Miniature connectors



Product description M16 IP40 Male panel mount connector, Contacts: 14 (14-b), unshielded, solder, IP40, front fastened


Area **M16 IP40 series 680** Part no. **09 0053 80 14**


Illustration

Scale drawing

Contact arrangement (Plug-in side)







You can find the component part drawing and assembly instructions on the next page.

Technical data

General features

Part no.	09 0053 80 14
Connector design	Male panel mount connector
Version	Connector pin straight
Connector locking system	screw
Termination	solder
Degree of protection	IP40
Cross-sectional area	0.25 mm ² / AWG 24
Temperature range from/to	-40 °C / 85 °C
Mechanical operation	> 500 Mating cycles
Weight (g)	11.49
Customs tariff number	85369010

Electrical parameters

Rated voltage	60 V
Rated impulse voltage	500 V
Rated current (40 °C)	3,0 A
Insulation resistance	$\geq 10^{10} \Omega$
Pollution degree	1
Overvoltage category	1
Insulating material group	III
EMC compliance	unshielded

Material

Housing material	Zinc die-cast nickel-plated
Contact body material	PBT (UL94 V-0)
Contact material	CuZn (brass)

Miniature connectors



Product description M16 IP40 Male panel mount connector, Contacts: 14 (14-b), unshielded, solder, IP40, front fastened

Area M16 IP40 series 680 Part no. 09 0053 80 14


Contact plating Au (gold)

REACH SVHC CAS 7439-92-1 (Lead)
SCIP number SCIP-number not available

Classifications

eCl@ss 11.1	27-44-01-09
ETIM 7.0	EC003569

Assembly instructions / Panel cut-out

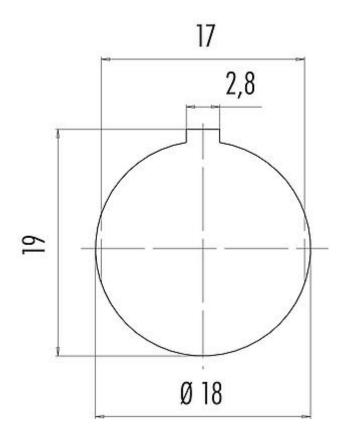


Miniature connectors



Product description M16 IP40 Male panel mount connector, Contacts: 14 (14-b), unshielded, solder, IP40, front fastened

Area M16 IP40 series 680 Part no. 09 0053 80 14

Component part drawing

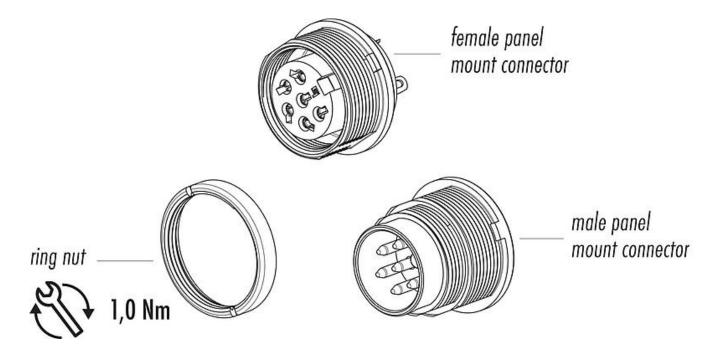

Miniature connectors



Product description M16 IP40 Male panel mount connector, Contacts: 14 (14-b), unshielded, solder, IP40, front fastened

Area M16 IP40 series 680 Part no. 09 0053 80 14

Security notices

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.