




Relays, Contactors & Switches > Relays > Power Relays

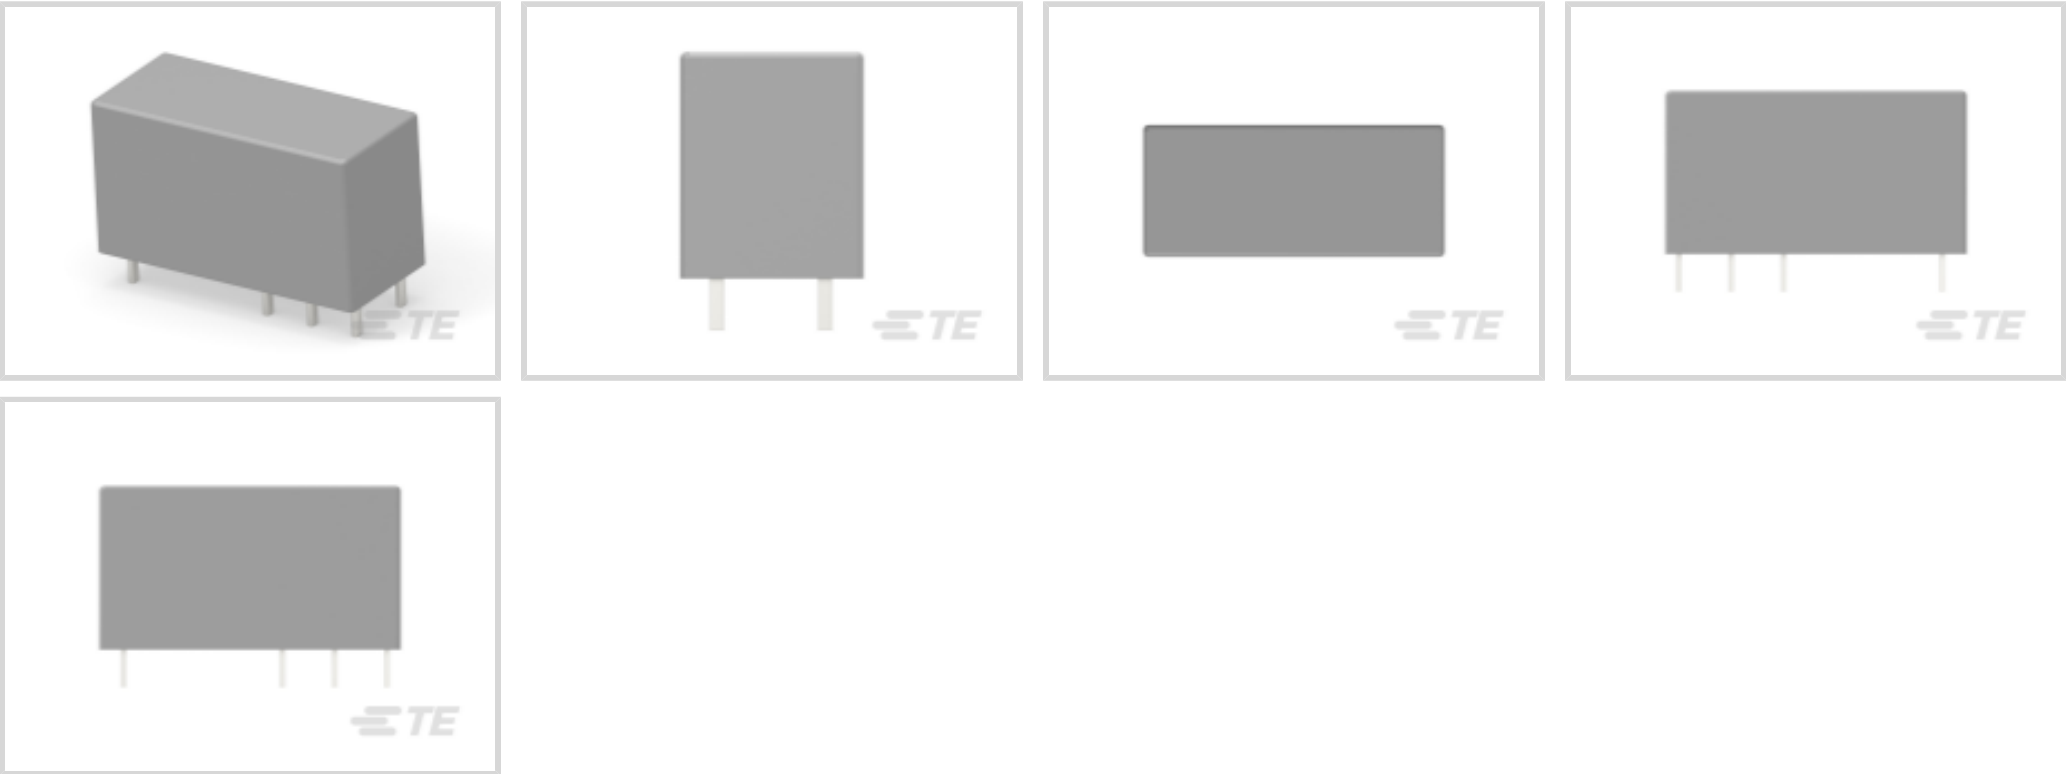

Power Relay Type: **Standard**
Coil Magnetic System: **Monostable, DC**
Coil Power Rating Class: **300 – 400 mW**
Coil Power Rating DC: **400 mW**
Coil Resistance: **1440 Ω**

Features

Product Type Features

| | |
|------------------|----------|
| Power Relay Type | Standard |
|------------------|----------|

Electrical Characteristics

| | |
|--|----------------|
| Insulation Initial Dielectric Between Coil & Contact Class | 4000 – 5000 V |
| Insulation Initial Dielectric Between Open Contacts | 1000 Vrms |
| Contact Limiting Making Current | 30 A |
| Insulation Creepage Class | 8 mm |
| Contact Limiting Continuous Current | 16 A |
| Insulation Initial Dielectric Between Contacts & Coil | 5000 Vrms |
| Insulation Creepage Between Contact & Coil | 10 mm[.394 in] |
| Contact Limiting Breaking Current | 16 A |
| Coil Magnetic System | Monostable, DC |
| Coil Power Rating Class | 300 – 400 mW |
| Coil Power Rating DC | 400 mW |
| Coil Resistance | 1440 Ω |



| | |
|---------------------------------|----------------------------|
| Coil Special Features | UL Coil Insulation Class F |
| Coil Voltage Rating | 24 VDC |
| Contact Switching Voltage (Max) | 400 VAC |
| Contact Voltage Rating | 250 VAC |

Body Features

| | |
|-----------------------------|-------------------------------------|
| Insulation Special Features | Tracking Index of Relay Base PTI250 |
| Product Weight | 14 g[.494 oz] |

Contact Features

| | |
|------------------------------|------------------|
| Contact Arrangement | 1 Form C (CO) |
| Contact Current Class | 10 – 20 A, 16 A |
| Contact Current Rating (Max) | 16 A |
| Contact Material | AgNi90/10 |
| Contact Number of Poles | 1 |
| Relay Terminal Type | PCB-THT, Plug-In |

Mechanical Attachment

| | |
|---------------------|-------------------------------|
| Relay Mounting Type | Printed Circuit Board, Socket |
|---------------------|-------------------------------|

Dimensions

| | |
|---|------------------|
| Length Class (Mechanical) | 25 – 30 mm |
| Insulation Clearance Class | 8 mm |
| Height Class (Mechanical) | 15 – 16 mm |
| Insulation Clearance Between Contact & Coil | 10 mm[.394 in] |
| Width Class (Mechanical) | 12 – 16 mm |
| Product Width | 12.7 mm[.5 in] |
| Product Length | 29 mm[1.142 in] |
| Product Height | 15.7 mm[.618 in] |

Usage Conditions

| | |
|---|---------------|
| Environmental Ambient Temperature (Max) | 85 °C[185 °F] |
|---|---------------|

Packaging Features

| | |
|------------------|--------------|
| Packaging Method | Carton, Tube |
|------------------|--------------|

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>



| | |
|---|---|
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC |
| Halogen Content | Not Low Halogen - contains Br or Cl > 900 ppm. |
| Solder Process Capability | Wave solder capable to 265°C |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 6-1415035-1
RT78726

TE Part # 1860306-1
RT78725

TE Part # 5-1415036-1
PTML0024

TE Part # 9-1415036-1
PTMT00A0

TE Part # 1860200-1
RT7872P

TE Part # 2-1393237-3
RT314024F

TE Part # 2022103-1
RT17017

TE Part # 2-1415036-1
PTMG0024



TE Part # 6-1415036-1
PTML0524

TE Part # 3-1415036-1
PTMG0524

TE Part # 1415037-1
PTMT00L0

TE Part # 1415540-8
RT28816

TE Part # 1415538-7
RT314024WG

TE Part # 8-1415036-1
PTML1024

TE Part # 1860991-1
RT78602, RELAY SOCKET PCB 5MM

Also in the Series | SCHRACK Power PCB Relay RT1

Power Relays(220)

Customers Also Bought

TE Part #5646951-1
2MM H.M. 8 + 2 ROW D/E PIN ASS

TE Part #9-1419111-1
PT570730

TE Part #3-1633961-6
CRIMPER, INSULATION F PREMIUM

TE Part #456426-3
CRIMPER WIRE .155 F

TE Part #7-1393243-9
RT424730

TE Part #1393240-7
RT314730

TE Part #1986375-3
Str Plug, 3.81mm, Green, LH, 3

TE Part #1-163680-1
12P.CIS.FEMALE CONN



Documents

CAD Files

Customer View Model

ENG_CVM_CVM_9-1393239-8_E.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_9-1393239-8_E.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_9-1393239-8_E.2d_dxf.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Lighting Relays Guide

English

Power PCB Relay RT1

English

Product Specifications

Definitions General Purpose Relays

English

Agency Approvals

VDE Certificate

English