

AMP | Junior Timer

TE Internal #: 963040-2

Housing for Female Terminals, Wire-to-Board / Wire-to-Device, 2

Position, .197 in [5 mm] Centerline, Sealable, Gray, Wire & Cable,

Power, Junior Timer

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > TIMER, CONNECTOR HOUSING



Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: 1.6 mm [.063 in]

Connector System: Wire-to-Board, Wire-to-Device

Number of Positions: 2

Centerline (Pitch): 5 mm [.197 in]

All TIMER, CONNECTOR HOUSING (540)

Features

Product Type Features

Connector Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Connector System	Wire-to-Board, Wire-to-Device
Sealable	Yes
Hybrid Connector	No
Primary Locking Feature	On the Terminal
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	2
Number of Rows	1
Electrical Characteristics	
Nominal Voltage Architecture	12 V
Body Features	
Cable Exit Angle	180°
Primary Product Color	Gray



Contact Size	1.6mm
Contact Type	Receptacle
Mating Tab Width	1.6 mm[.063 in]
Contact Current Rating (Max)	20 A
Mechanical Attachment	
Terminal Position Assurance	No
Strain Relief	Without
Mating Alignment Type	Polarization Slot
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PBT GF
Centerline (Pitch)	5 mm[.197 in]
Dimensions	
Connector Height	35.5 mm[1.398 in]
Product Width	23.6 mm[.929 in]
Product Length	23.4 mm[.921 in]
Usage Conditions	
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C [158 °F][167 °F][176 °F][185 °F][194 °F][212 ° F]
Operating Temperature Range	-40 - 100 °C[-40 - 212 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	
UL Flammability Rating	UL 94HB
Packaging Features	
Packaging Method	Package
Other	
Serviceable	No
Connector Position Assurance Capable	No



Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUN 2020 (209) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

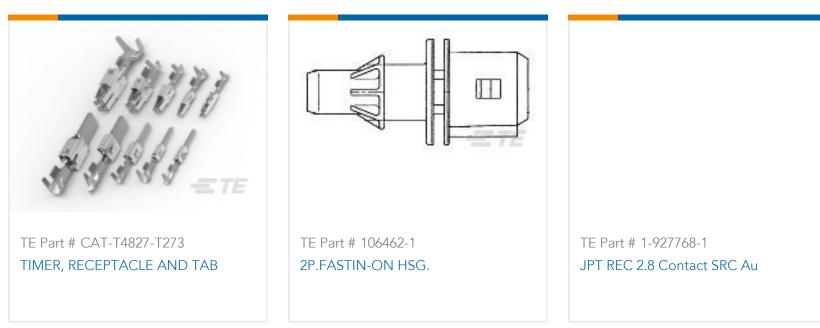

Also in the Series | Junior Timer





Automotive Housings(64)



Automotive Terminals(12)




PCB Headers & Receptacles(3)

Customers Also Bought



TE Part #HDP24-18-20PE-L017 REC, 20P, BLK, E, RNG, 16/20, P



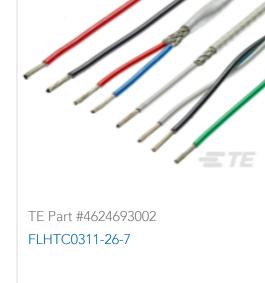











Documents

Product Drawings 2P JUN-TIMER GEH

English

CAD Files

Customer View Model

ENG_CVM_963040-2_G.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_963040-2_G.3d_igs.zip

English

Customer View Model

ENG_CVM_963040-2_G.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Housing for Female Terminals, Wire-to-Board / Wire-to-Device, 2 Position, .197 in [5 mm] Centerline, Sealable, Gray, Wire & Cable, Power, Junior Timer



Datasheets & Catalog Pages
Timer Interconnection System

English