



Data Sheet | Item Number: 289-456

Interface module; with solder pin; Female connector; 15-pole; Mating connector with solder connection; Vertical mounting; PCB terminal blocks, double-row; with mounting feet; 2,50 mm²

<https://www.wago.com/289-456>

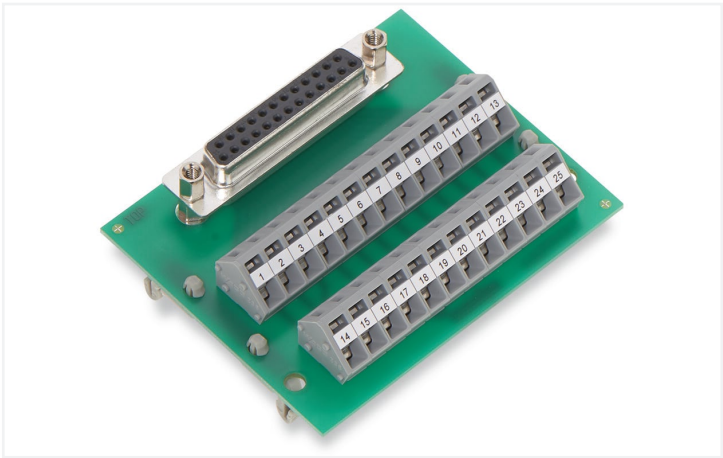

Similar to illustration

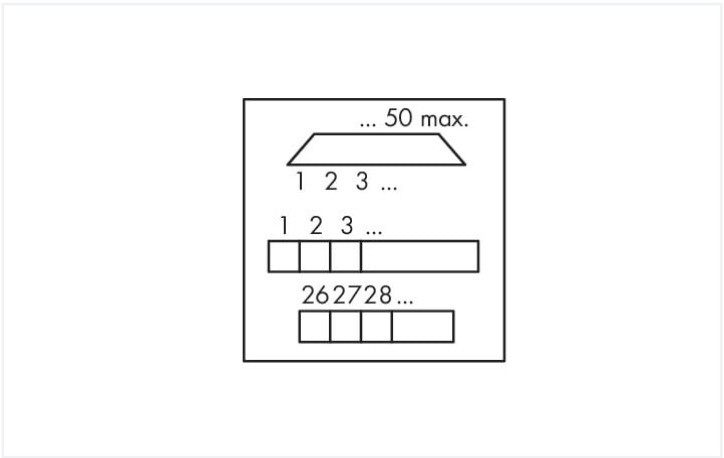

Electrical data	
Operating voltage	≤30 VAC; ≤50 VDC
Nominal current	1 A
Contact resistance (max.)	30 mΩ

Safety and protection	
Rated voltage	50 V
Rated surge voltage	0.8 kV
Pollution degree	2
Protection type	IP00; Notice! Live parts can be easily touched! Protection against direct contact must be provided by the equipment manufacturer, e.g., using a WAGO 709 Series Cover (see "Accessories") or a similar cover. The installation guidelines must be observed for each individual application.
Insulation type	Basic insulation

Connection data	
Performance level	2 / 200 mating cycles
Strain relief	UNC 4-40 stud bolt
Connection 1	
Connector	D-subminiature female connector
Pole number 1	15
Connection type 1	System
Note (conductor cross-section)	12 AWG: THHN, THWN
Mating direction	vertical
For mating connector	with solder contact
Connection type	Female connector; D-sub/HD D-sub

Connection 2	
Design 2	PCB terminal blocks (double-row)
Pole number 2	15
Connection type 2	Field
Connection technology 2	CAGE CLAMP®
WAGO connector 2	WAGO 236 Series
Solid conductor 2	0.08 ... 2.5 mm² / 28 ... 12 AWG

Connection 2	
Fine-stranded conductor 2	0.08 ... 2.5 mm² / 28 ... 12 AWG
Strip length 2	5 ... 6 mm / 0.2 ... 0.24 inches



Physical data		
Width		53.5 mm / 2.106 inches
Height		63.5 mm / 2.5 inches
Depth from upper-edge of DIN-rail		19 mm / 0.748 inches

Mechanical Data		
Mounting type		DIN-35 rail
Housing design		PCB with mounting feet

Material Data		
Contact material (connector)		Au over Ni
Fire load		0.054 MJ
Weight		37.1 g

Environmental requirements		
Ambient temperature (operation at U _N)		-20 ... +50 °C
Surrounding air temperature (storage)		-40 ... +70 °C
Relative humidity		≤ 85% (non-condensing)
Operating altitude (max.)		2000 m

Standards and specifications		
Standards/specifications		EN 61010-2-201

Commercial data		
Product Group		6 (INTERFACE ELECTRONIC)
eCl@ss 10.0		27-14-11-52
eCl@ss 9.0		27-14-11-52
ETIM 8.0		EC002780
ETIM 7.0		EC002780
PU (SPU)		30 (1) pcs
Packaging type		Box
Country of origin		DE
GTIN		4045454417819
Customs tariff number		85366990990