





74WR-50/74WR-400

Mechanical Adjustable Torque Click Wrench with Window Scale and Fixed Push-Through Ratchet Head



PRODUCT DETAILS

- Durable mechanism with over 100,000 cycles within accuracy
- Fast scale adjustment reducing the effort required to adjust
- TIMESTRIP visual indication that the wrench is due for re-calibration and has 3, 6, 9 and 12-month graduations
- Large dual scale in N·m/ft.lb
- Range covering from 10 and 400 N·m/7.5 - 300 ft.lb torque values
- Can be used clockwise or anticlockwise by pushing across the square drive of the ratchet head
- Accurate to $\pm 3\%$ of reading which exceeds the requirements of ISO6789-1:2017
- Clicking system triggers a tactile and audible signal
- Push-through ratchet heads from 3/8" to 3/4" square drives allowing CW and ACW operations
- Handle centre or calibration force point marked on handle
- Lock/unlock knob with blue ring inside to warn the operator the wrench is unlocked
- In a semi-transparent square tube with eurohole hanger
- All wrenches come with a factory declaration of conformity traceable to international standards
- ISO 6789
- Made in the UK

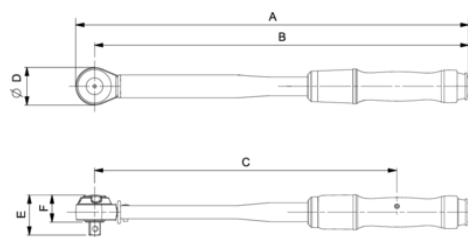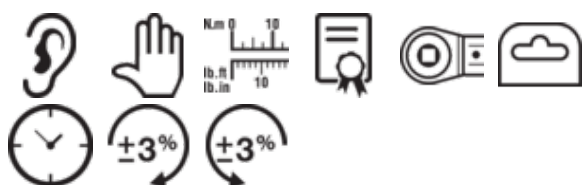







Follow the Fish!









PRODUCT ATTRIBUTES







Product: 74WR-100

	20-100 Nm		15-75 lb·ft		1/2"
	1 Nm		1 lb·ft	A	387 mm
B	364 mm	C	278 mm	D	45 mm
E	48 mm	F	32 mm		0.900 kg







Product: 74WR-50

	10-50 Nm		7.5-37.5 lb·ft		3/8"
	0,5 Nm		0,5 lb·ft	A	335 mm
B	317 mm	C	231 mm	D	35 mm
E	37 mm	F	26 mm		0.700 kg







Product: 74WR-340

	60-340 Nm		45-250 lb·ft		1/2"
	5 Nm		2 lb·ft	A	685 mm
B	659 mm	C	572 mm	D	52 mm
E	48 mm	F	33 mm		1.500 kg







Product: 74WR-200

	40-200 Nm		30-150 lb·ft		1/2"
	2 Nm		2 lb·ft	A	470 mm
B	447 mm	C	361 mm	D	45 mm
E	48 mm	F	32 mm		1.100 kg







Product: 74WR-100B

	20-100 Nm		15-75 lb·ft		3/8"
	1 Nm		1 lb·ft	A	387 mm
B	364 mm	C	278 mm	D	36 mm
E	37 mm	F	26 mm		

Product: 74WR-400

	80-400 Nm		60-300 lb·ft		3/4"
	5 Nm		5 lb·ft	A	686 mm
B	661 mm	C	574 mm	D	51 mm
E	47 mm	F	24 mm		1.900 kg

Product: 74WR-300

	60-300 Nm		45-220 lb·ft		1/2"
	2 Nm		2 lb·ft	A	593 mm
B	567 mm	C	480 mm	D	52 mm
E	48 mm	F	33 mm		1.400 kg

Follow the Fish!



Contact: info@bahco.com / www.bahco.com