# SO63-3-55-22-90 ACTIVE

## Raychem

TE Internal #: 621836-000

SolderSleeve Shield Terminators, Shield Terminator, Operating Temperature (Max) 150 °C, Expanded Inside Diameter (Min) 4.3 mm

[.17 in]

View on TE.com >



Harnessing > Interconnect Devices > SolderSleeve Shield Terminators



Product Type: Shield Terminator

Operating Temperature (Max): 150 °C

Expanded Inside Diameter (Min): 4.3 mm [ .17 in ]

Recovered Inside Diameter (Max): 1.25 mm [ .05 in ]

Pre-Installed Lead: Yes

## **Features**

## **Product Type Features**

Splice Type	Shield Terminator
Temperature Indicator Type	Fusible Ring
Temperature Indicator	Yes
Product Type	Shield Terminator

## **Configuration Features**

Pre-Installed Lead Type	55A0111
Pre-Installed Lead	Yes

# **Body Features**

Lead Color	White/Black
Lead Plating Material	Tin
Lead Stranding	Stranded

### **Termination Features**

Termination Method	Solder
--------------------	--------

#### **Dimensions**

Pre-Installed Lead Wire Size	.38 mm²
Dielectric Outside Diameter (Max)	1.25 mm[.05 in]
Shield Outside Diameter (Min)	2.15 mm[.085 in]
Overall Length	16.5 mm[.65 in]



Jacket Outside Diameter	4.3 mm[.17 in]
Expanded Inside Diameter (Min)	4.3 mm[.17 in]
Recovered Inside Diameter (Max)	1.25 mm[.05 in]
Usage Conditions	
Operating Temperature (Max)	150 °C
Resistance Properties	Immersion Protection
Wire Temperature (Max)	125 °C
Industry Standards	
Government Qualified	No

No

# **Product Compliance**

For compliance documentation, visit the product page on TE.com>

MIL/NAS Specification (MIL-S-83519, NAS-1747)


EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUN 2020 (209)  Candidate List Declared Against: JAN 2020 (205)  Pb (37% in Solder)  Article Safe Usage Statements:  Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Out of Scope - excluded from Halogen requirements
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach



# Compatible Parts

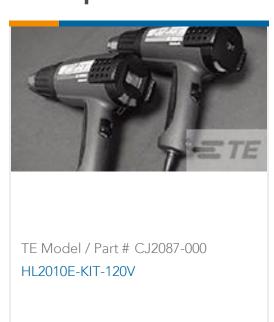

# Customers Also Bought

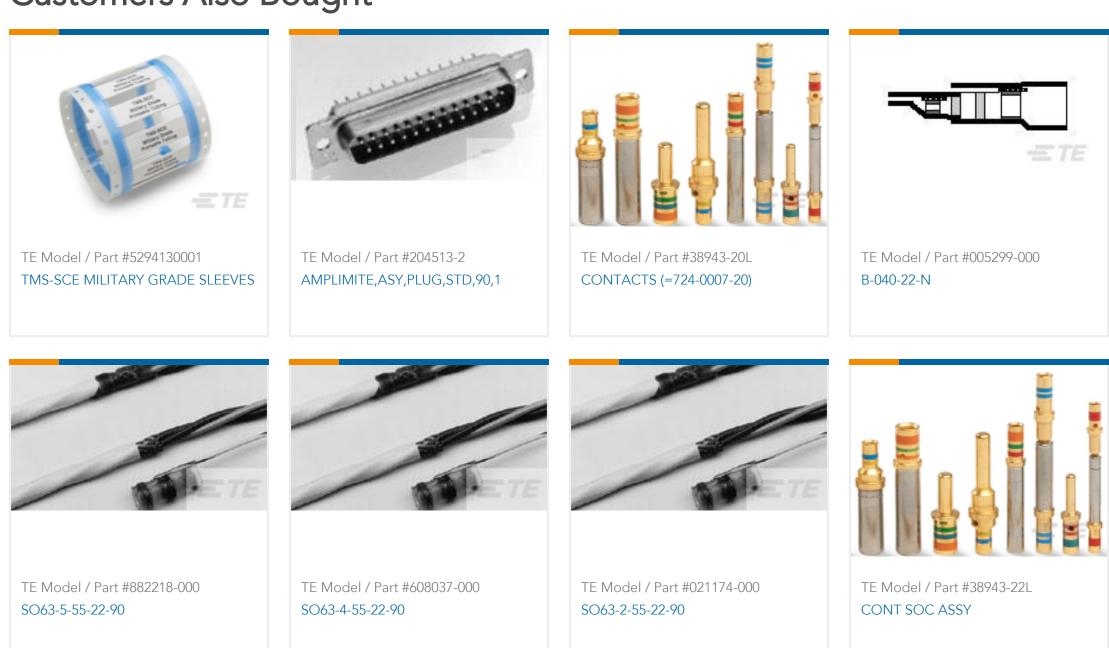

## **Documents**

Product Drawings SO63-3-55-22-90

English

Datasheets & Catalog Pages

1654025\_Sec8\_B-155\_CWT\_SO63\_S01to03\_SO96

English

**Raychem Electrical Interconnect Products** 

English