

Technical data sheet

Screw-in nipple, metric thread, with perforation membrane

Art.-Nr. 2032384



With perforation membranes, the opening D is pre-marked, but closed.

Grip seal to screw into metric thread to IEC 423.

With self-sealing cone at the end of the thread, therefore no connection thread sealing ring required.

Protection rating achievable with careful mounting: IP54.



PE Polyethylene

Additional product text 1 | With perforation membranes, the opening D is pre-marked, but closed.

Master data

Item no.	2032384
Type	90 M25 GE
Description 1	Screw-in nipple
Description 2	closed version
Dimension	M25
Colour	Light grey
RAL number	7035
Material	Polyethylene
Material symbol	PE
Smallest sales unit	50,00 Piece
Weight	0,51 kg/100 pc.


Technical data sheet

Screw-in nipple, metric thread, with perforation membrane

Art.-Nr. 2032384



Technical data

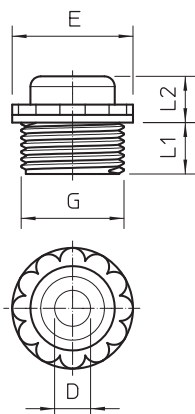

Dimension D	8,50 mm
Dimension E	32,00 mm
Dimension L1	12,00 mm
Dimension L2	6,00 mm
Thread length	12,00 mm
Thread	M25 x 1,5
Size	M25
Halogen-free	<input checked="" type="checkbox"/>
Protection rating	IP54
WAF	30,00 mm