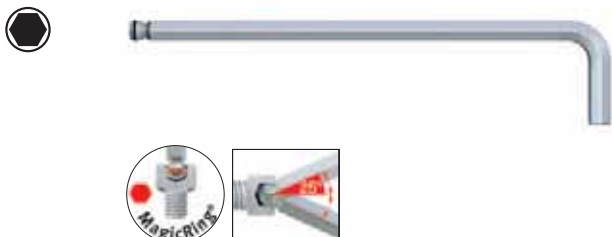


For Allen screws (metric).


369R Ball end hex L-key, long.
With MagicRing®.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
 Standards: Based on ISO 2936L.
 Application: Insert screws into or remove from boreholes, especially in difficult to access areas.
 Extra: MagicRing® of spring steel (from size 3 mm) secures all hex standard screws independently of screw material in any position.
 The ball end enables the user to work at angles up to 25°.

Order-No.	●	↔	↗	↘
20549	3	128	23	10
20550	4	142	29	10
20570	5	163	33	10
20551	6	184	38	10
20552	8	206	44	10
20553	10	231	50	5

For Allen screws (metric).

**NEW**
369R H9 Hexagon ball end L-key set in ErgoStar holder.
With MagicRing®, chrome-plated, 9 pcs.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
 Standards: Based on ISO 2936L.
 Application: Insert screws into or remove from boreholes, especially in difficult to access areas.
 Extra: Mechanical operation of the space-saving ErgoStar holder makes simplest removal of each individual L-key possible without movement of the others.
 MagicRing® of spring steel (from size 3 mm) secures all hex standard screws independently of screw material in any position.
 The ball end enables the user to work at angles up to 25°.

Order-No.	Series	↔
37351	369R H9	5
● 369	1.5 2 2.5	
● 369R	3 4 5 6 8 10	

NEW
SB 369R H9 Hexagon ball end L-key set in ErgoStar holder.
With MagicRing®, chrome-plated, 9 pcs.
Blister packed
With practical wall bracket.

Order-No.	Series	↔
37352	SB 369R H9	5
● 369	1.5 2 2.5	
● 369R	3 4 5 6 8 10	



Wiha Info

**Wiha MagicRing®.**

Thanks to the Wiha MagicRing®, inserting and removing screws is safe and easy, even in areas that are difficult to access.