



Triple Surface Mounted Power Socket

12-24 V, 20 A max. based on a cable cross section of 2.5 mm², 16 A based on a cable cross section of 1.5 mm². Internal Ø 21 mm. Mounting screws included

| | BP | SP |
|---------|----------|----------|
| | SU = 100 | SU = 20 |
| 12-24 V | 67601000 | 67611000 |



Triple Power Socket

With universal plug 16 A, connection possible to all cigarette lighter sockets and DIN standard sockets, 12-24 V, 16 A max. with three sockets. Internal Ø 21 mm. Cable: 2 x 1.5 mm² flat cable. Length: 2.0 m

| | BP | SP |
|----------------|----------|----------|
| | SU = 50 | SU = 20 |
| 12-24 V / 16 A | 67601500 | 67611500 |



Power Socket with clamp sleeve

Designed to operate electrical devices in cars, boats and caravans. Current-carrying capacity: 20 A based on a cable cross section of 2.5 mm², 16 A based on a cable cross section of 1.5 mm². Internal Ø 21mm, port for installation 27.8 mm. Fastening by clamp sleeve.

| | BP | SP |
|-----------------------------|----------|----------|
| illuminated | SU = 160 | SU = 60 |
| 12 V, clamp sleeve clear | 68040740 | 68140740 |
| 12 V, clamp sleeve red | 68040750 | 68140750 |
| 12 V, clamp sleeve green | 68040760 | 68140760 |
| 24 V, clamp sleeve clear | 68040770 | 68140770 |
| 24 V, clamp sleeve red | 68040780 | 68140780 |
| 24 V, clamp sleeve green | 68040790 | 68140790 |
| without illumination | SU = 160 | SU = 60 |
| 12-24 V, clamp sleeve green | 68040860 | 68140860 |



NEW
with USB

Triple Surface Mounted Socket with USB Socket

Two power sockets max. 20 A based on a cable cross section of 2.5 mm², 16 A based on a cable cross section of 1.5 mm² and one USB Socket 12 V DC / 5 V DC 1000 mA, for charging and operating sat navs, mobile phones, smart phones, PDAs, digital cameras and devices that are suitable for charging by 5 Volt USB.

| | BP | SP |
|------|----------|----------|
| | SU = 100 | SU = 20 |
| 12 V | 67314000 | 67314500 |




NEW
with USB

Triple Power Socket with USB Socket

Two power sockets and one USB socket 12 V DC / 5 V DC 1000 mA, for charging and operating sat navs, mobile phones, smart phones, PDAs, digital cameras and devices that are suitable for charging by 5 Volt USB.

| | BP | SP |
|-------------|----------|----------|
| | SU = 50 | SU = 20 |
| 12 V / 16 A | 67315000 | 67315500 |

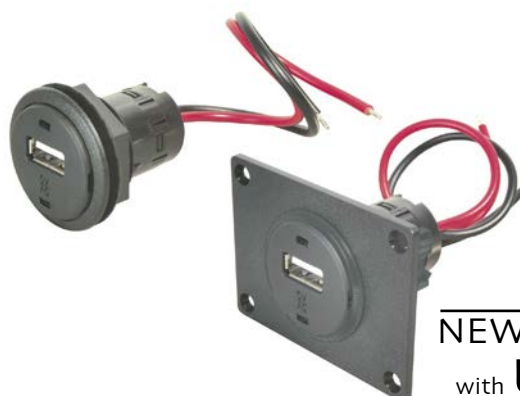

NEW
with USB

USB Built-In Socket with and without Mounting Plate

12 V DC / 5 V DC 1000 mA, with integrated power voltage converter, for charging and operating sat navs, mobile phones, smart phones, PDAs, digital cameras and devices that are suitable for charging by 5 Volt USB. Fastening by plastic screw nut, installation dimensions Ø 27,8 mm

| | BP | SP |
|------------------------------|----------|----------|
| | SU = 100 | SU = 60 |
| 12 V, without mounting plate | 67311000 | 67311500 |
| 12 V, with mounting plate | 67312000 | 67312500 |