

HX-SCE-1K-9.5-50-4

✓ ACTIVE

HX-SCE


TE Internal #: A95650-000

HX-SCE, Printable Tubing, Ladder Tubing Type, Low Fire Hazard
Tubing Grade, 2:1 Printable Tubing Shrink Ratio, Yellow, Markers
per Sleeve 1

[View on TE.com >](#)



Identification & Labeling > Printable Tubing > HX-SCE LOW FIRE HAZARD SLEEVES

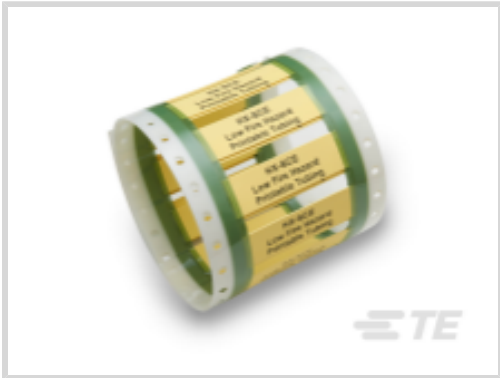

Tubing Type: **Ladder**
Tubing Grade: **Low Fire Hazard**
Printable Tubing Shrink Ratio: **2:1**
Color: **Yellow**
Markers per Sleeve: 1

[All HX-SCE LOW FIRE HAZARD SLEEVES \(48\)](#)

Features

Product Type Features

Tubing Type	Ladder
Tubing Grade	Low Fire Hazard

Body Features

Printable Tubing Shrink Ratio	2:1
Color	Yellow
Markers per Sleeve	1

Dimensions

Sleeve Length	50 mm[2 in]
Supplied Diameter	9.5 mm[.375 in]
Recovered Inside Diameter	4.7 mm[.187 in]
Compatible Cable Diameter	5.5 – 8.1 mm[.22 – .32 in]

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Recommended Ribbon	See Printer Ribbon Matrix
--------------------	---------------------------



Printer/Label Features

Recommended Printer	See Printer Ribbon Matrix
Printer Technology	Thermal Transfer

Packaging Features

Packaging Quantity	1000
--------------------	------

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUN 2020 (209) Candidate List Declared Against: JUN 2020 (209) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1-2186502-1
T3224-PRINTER

TE Part # 1-2186500-1
T3212-PRINTER

TE Part # CP8122-000
T6112DS-PRINTER

TE Part # 1-2186503-1
T3224-SWARE-PRINTER

TE Part # 1-2186501-1
T3212-SWARE-PRINTER

Also in the Series | HX-SCE

Printable Tubing(49)

Customers Also Bought

TE Part #E66448-000
HX-SCE LOW FIRE HAZARD SLEEVES

TE Part #1661090001
RPS COMMERCIAL GRADE SLEEVES

Documents

Product Drawings
HX-SCE-1K-9.5-50-4

English

Datasheets & Catalog Pages
Technical Datasheet for HX-SCE Heat Shrink Marker Sleeves

English



Cable Identification Product Shelf Life

English

IDENTIFICATION SELECTION GUIDE

English

Product Specifications

HX - LFH Heat Shrink Sleeving

English

IDENTIFCATION PRINTER PRODUCT RIBBON MATRIX

English

Instruction Sheets

Instruction Sheet (non U.S.)

English