

J-PRO™ Cable Support System

Let PANDUIT Support Your Cables

The *J-PRO™* Cable Support System is designed to provide a competitive alternative to metal J Hooks for routing cables throughout the physical infrastructure. This system provides complete bend radius control and includes many easy to use mounting options to provide the lowest installed cost. The selection of multiple sizes, colors, and pre-riveted J Hook assemblies meet the requirements of a wide variety of applications and are suitable for use in air handling spaces.

Now available in four sizes and select colors



JP75 Series



JP131 Series



JP2 Series



JP4 Series




Key Features

Benefits

<i>Multiple size J Hooks</i>	Available in 3/4", 1 5/16", 2" and 4" bundle capacities to meet requirements of a variety of applications throughout the physical infrastructure
<i>Complete horizontal and vertical 1" bend radius control</i>	Helps prevent degradation of cable performance Prevents pinch points that could cause damage to cable
<i>UL 2043 and CAN/ULC S102.2 approved</i>	Suitable for use in air handling spaces
<i>Color options</i>	Provide means to segregate and identify cable bundles for specific applications, such as data, voice, security, fire alarm or other applications that require a designated pathway
<i>Pre-riveted assemblies</i>	Allow for attachment to ceilings, beams, threaded rods, drop wires and under floor supports to meet requirements of a variety of applications
<i>Cable tie channel</i>	Allows user to install 3/4" <i>TAK-TY®</i> Cable Tie and provides a method to retain and manage cable bundles
<i>Non-metallic J Hook</i>	Prevents cables from coming in contact with metal

J-PRO™ Cable Support System

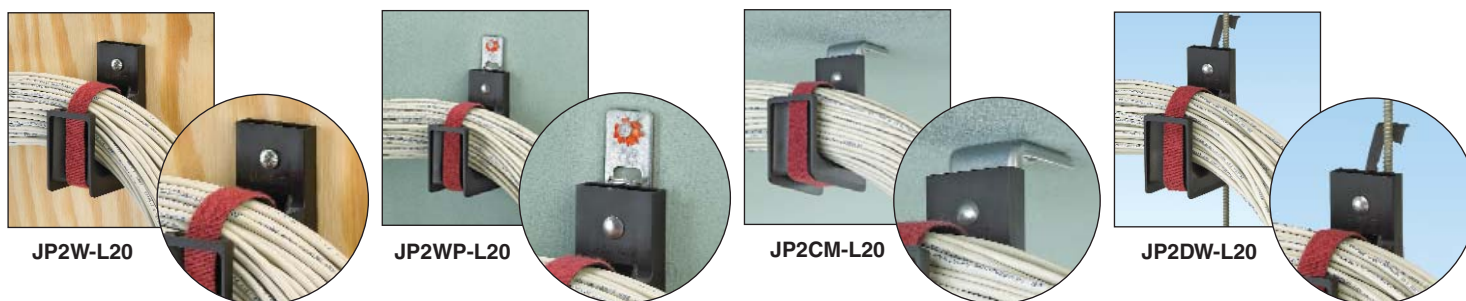

Ordering Information



JP2W-L20



JP2WP-L20



JP2CM-L20



JP2DW-L20

Wall Mount

Part Number	Part Description	Max. Bundle Capacity		Max. Cable Capacity*			Material**	Max. Static Load		Std. Pkg. Qty.
		In.	mm	Category 5e (.187")	Category 6 (.250")	Category 6A (.289")		Lbs.	kg	
JP75W-L20^	J Hook for wall mount applications. One 1/4" (M6) mounting hole for user supplied screw.	.75	19.0	11	6	4	Nylon 6.6	15	6.81	50
JP131W-L20		1.31	33.3	31	17	13		25	11.3	50
JP2W-L20^‡***		2.00	50.8	56	31	23		30	13.6	50
JP4W-X20^‡***		4.00	101.6	228	127	95		100	45.37	10

Wall Mount with Bracket

JP75WP-L20^	J Hook for powder actuated installation on walls. One 5/32" (M4) mounting hole for user supplied fasteners.	.75	19.0	11	6	4	Nylon 6.6 J Hook with metal attachments	15	6.81	50
JP131WP-L20		1.31	33.3	31	17	13		25	11.3	50
JP2WP-L20^		2.00	50.8	56	31	23		30	13.61	50
JP4WP-X20		4.00	101.6	228	127	95		100	45.37	10

Ceiling Mount

JP75CM-L20^	J Hook with ceiling mount bracket that has one 3/16" (M5), 1/4" (M6) and 3/8" (M10) mounting hole.	.75	19.0	11	6	4	Nylon 6.6 J Hook with metal attachments	15	6.81	50
JP131CM-L20		1.31	33.3	31	17	13		25	11.3	50
JP2CM-L20^		2.00	50.8	56	31	23		30	13.61	50
JP4CM-X20		4.00	101.6	228	127	95		100	45.37	10

Drop Wire and Threaded Rod Clip

JP75DW-L20^	J Hook with clip for use with #12 wire, threaded rod up to 1/4" in diameter, or 1/8" – 1/4" thick flanges.	.75	19.0	11	6	4	Nylon 6.6 J Hook with metal attachments	10	4.53	50
JP131DW-L20		1.31	33.3	31	17	13		10	4.53	50
JP2DW-L20^‡		2.00	50.8	56	31	23		10	4.53	50

*PANDUIT Cable is referenced for cable dimension.

**Suitable for use in air handling spaces in accordance with Sec. 300.22(c) and (d) of the National Electrical Code when mounted as single units or in pairs. JP4 family of parts suitable for use in single unit configurations only.

Listed in accordance with CAN/ULC S102.2 when mounted as single units or in pairs. Maximum spacing of 4' (1220mm) required between mount points. (Flame Spread Rating = 0, Smoke Developed Classification = 20)

^ Available in red. Replace -L20 with -L2 or -X20 with -X2 in part number suffix.

‡ Available in blue. Replace -L20 with -L6 or -X20 with -X6 in part number suffix.

***Available in natural (white). Replace -L20 with -L or -X20 with -X in part number.

J-Pro™ Cable Support System




JP2SBC50R-L20



JP2SBC87R-L20



JP2ZP-L20



JP2CP-L20

Screw-On Beam Clamps



JP2SBC50-L20



JP2SBC50R-L20



JP2SBC87-L20



JP2SBC87R-L20

Part Number	Part Description	Max. Bundle Capacity		Max. Cable Capacity*			Material**	Max. Static Load		Std. Pkg. Qty.
		In.	mm	Category 5e (.187")	Category 6 (.250")	Category 6A (.289")		Lbs.	kg	
JP75SBC50-L20	J Hook with screw-on beam clamp for use with flanges up to 1/2" thick.	.75	19.0	11	6	4	Nylon 6.6 J Hook with metal attachments	15	6.81	50
JP131SBC50-L20		1.31	33.3	31	17	13		25	11.3	50
JP2SBC50-L20		2.00	50.8	56	31	23		30	13.61	50
JP4SBC50-X20		4.00	101.6	228	127	95		25	11.3	10
JP75SBC50R-L20^	J Hook with screw-on beam clamp for use with flanges up to 1/2" thick. Rotates 360°.	.75	19.0	11	6	4		15	6.81	50
JP131SBC50R-L20		1.31	33.3	31	17	13		25	11.3	50
JP2SBC50R-L20***		2.00	50.8	56	31	23		30	13.61	50
JP4SBC50R-X20		4.00	101.6	228	127	95		100	45.37	10
JP75SBC87-L20	J Hook with screw-on beam clamp for use with flanges up to 3/4" thick.	.75	19.0	11	6	4		15	6.81	50
JP131SBC87-L20		1.31	33.3	31	17	13		25	11.3	50
JP2SBC87-L20		2.00	50.8	56	31	23		30	13.61	50
JP4SBC87-X20		4.00	101.6	228	127	95		100	45.37	10
JP75SBC87R-L20	J Hook with screw-on beam clamp for use with flanges up to 3/4" thick. Rotates 360°.	.75	19.0	11	6	4		15	6.81	50
JP131SBC87R-L20		1.31	33.3	31	17	13		25	11.3	50
JP2SBC87R-L20		2.00	50.8	56	31	23		30	13.61	50
JP4SBC87R-X20		4.00	101.6	228	127	95		100	45.37	10

Purlin Clips



JP2ZP-L20



JP2CP-L20

JP75ZP-L20	J Hook with z-purlin clip for use with angled flanges up to 1/4" thick.	.75	19.0	11	6	4	Nylon 6.6 J Hook with metal attachments	15	6.81	50
JP131ZP-L20		1.31	33.3	31	17	13		25	11.3	50
JP2ZP-L20		2.00	50.8	56	31	23		30	13.61	50
JP4ZP-X20		4.00	101.6	228	127	95		100	45.37	10
JP75CP-L20	J Hook with c-purlin clip for use with vertical flanges up to 1/4" thick.	.75	19.0	11	6	4		15	6.81	50
JP131CP-L20		1.31	33.3	31	17	13		25	11.3	50
JP2CP-L20		2.00	50.8	56	31	23		30	13.61	50
JP4CP-X20		4.00	101.6	228	127	95		100	45.37	10

*PANDUIT Cable is referenced for cable dimension.


**Suitable for use in air handling spaces in accordance with Sec. 300.22(c) and (d) of the National Electrical Code when mounted as single units or in pairs. JP4 family of parts suitable for use in single unit configurations only.
Listed in accordance with CAN/ULC S102.2 when mounted as single units or in pairs. Maximum spacing of 4' (1220mm) required between mount points. (Flame Spread Rating = 0, Smoke Developed Classification = 20)

^ Available in red. Replace -L20 with -L2 or -X20 with -X2 in part number suffix.


***Available in natural (white). Replace -L20 with -L or -X20 with -X in part number.



JP2HBC25R-L20



JP2UF100-L20



Hammer-On Beam Clamps



JP2HBC25R-L20
JP2HBC50R-L20
JP2HBC75R-L20

Part Number	Part Description	Max. Bundle Capacity		Max. Cable Capacity*			Material**	Max. Static Load		Std. Pkg. Qty.
		In.	mm	Category 5e (.187")	Category 6 (.250")	Category 6A (.289")		Lbs.	kg	
JP75HBC25R-L20	J Hook with hammer-on beam clamp for use with flanges 1/8" – 1/4" thick. Rotates 360°.	.75	19.0	11	6	4	Nylon 6.6 J Hook with metal attachments	15	6.81	50
JP131HBC25R-L20		1.31	33.3	31	17	13		25	11.3	50
JP2HBC25R-L20		2.00	50.8	56	31	23		30	13.61	50
JP4HBC25R-X20		4.00	101.6	228	127	95		100	45.37	10
JP75HBC50R-L20	J Hook with hammer-on beam clamp for use with flanges 5/16" – 1/2" thick. Rotates 360°.	.75	19.0	11	6	4		15	6.81	50
JP131HBC50R-L20		1.31	33.3	31	17	13		25	11.3	50
JP2HBC50R-L20		2.00	50.8	56	31	23		30	13.61	50
JP4SBC50R-X20		4.00	101.6	228	127	95		100	45.37	10
JP75HBC75R-L20	J Hook with hammer-on beam clamp for use with flanges 9/16" – 3/4" thick. Rotates 360°.	.75	19.0	11	6	4		15	6.81	50
JP131HBC75R-L20		1.31	33.3	31	17	13		25	11.3	50
JP2HBC75R-L20		2.00	50.8	56	31	23		30	13.61	50
JP4HBC75R-X20		4.00	101.6	228	127	95		100	45.37	10

Under Floor Pedestal Clamp



JP2UF100

JP75UF100-L20	J Hook with underfloor pedestal support clamp for use with pedestal support up to 1" diameter.	.75	19.0	11	6	4	Nylon 6.6 J Hook with metal attachments	15	6.81	50
JP131UF100-L20		1.31	33.3	31	17	13		25	11.3	50
JP2UF100-L20		2.00	50.8	56	31	23		30	13.61	50
JP4UF100-X20		4.00	101.6	228	127	95		100	45.37	10

*PANDUIT Cable is referenced for cable dimension.

**Suitable for use in air handling spaces in accordance with Sec. 300.22(c) and (d) of the National Electrical Code when mounted as single units or in pairs. JP4 family of parts suitable for use in single unit configurations only. Listed in accordance with CAN/ULC S102.2 when mounted as single units or in pairs. Maximum spacing of 4' (1220mm) required between mount points. (Flame Spread Rating = 0, Smoke Developed Classification = 20)

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA
Markham, Ontario
cs-cdn@panduit.com
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.3767.7011

PANDUIT LATIN AMERICA
Jalisco, Mexico
cs-la@panduit.com
Phone: 52.333.777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of PANDUIT product warranties, log on to www.panduit.com/warranty



For more information
Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800-777-3300 and reference WACB15

©2008 PANDUIT Corp.
ALL RIGHTS RESERVED.
Product Bulletin **WW-WACB15**
replaces SA-WACB11
8/2008