

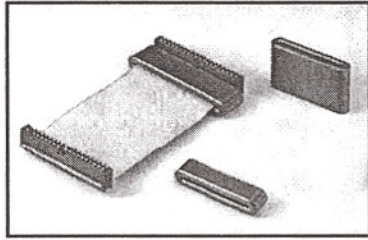


### EMV-FLACHBANDKABELFERRIT

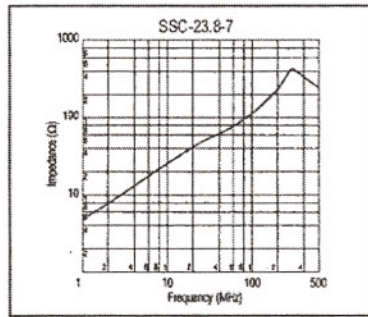

#### Typ SSC

- Geeignet bei hochfrequenten Störungen auf Flachbandleitungen.
- Ausführliche Datenblätter auf Anfrage.

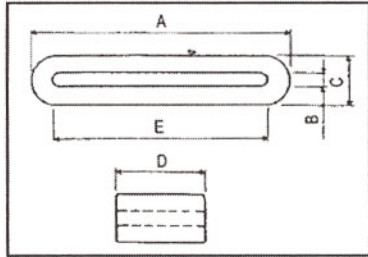

Art.-Nr.	Typ	A	B	C	D	E	Impedanz Ω		max. Polzahl
							25 MHz	100 MHz	
601 02 10	SSC-18-8	18.0	1.0	5.0	8.0	14.0	24	55	11
601 02 11	SSC-23.8-7	23.8	1.1	6.3	7.0	18.8	27	51	14
601 02 14	SSC-23.8-15	23.8	1.1	6.3	15.0	18.8	46	88	14
601 02 16	SSC-25-10	25.0	1.2	5.0	10.0	21.0	24	60	16
601 02 15	SSC-25-12	25.0	1.1	5.0	12.0	21.0	27	75	16
601 02 18	SSC-28.6-25	28.6	1.8	7.7	25.0	23.6	45	95	18
601 02 30	SSC-33.5-7	33.5	1.4	6.5	7.0	27.0	20	57	21
601 02 01	SSC-33.5-8	33.5	1.3	6.5	8.0	27.0	21	44	21
601 02 04	SSC-33.5-10	33.5	1.3	6.5	10.0	27.0	26	51	21
601 02 04	SSC-33.5-10-2	33.5	2.2	7.4	10.0	27.0	27	50	21
601 02 03	SSC-33.5-12	33.5	1.3	6.5	12.0	27.0	31	58	21
601 02 35	SSC-33.5-15	33.5	1.4	6.5	15.0	27.0	32	81	21
601 02 05	SSC-33.5-20	33.5	1.3	6.5	20.0	27.0	50	90	21
601 02 39	SSC-33.5-22	33.5	1.4	6.5	22.0	27.0	43	95	21
601 02 19	SSC-40-6	40.0	1.4	6.5	6.0	35.0	16	50	27
601 02 21	SSC-40-10	40.0	1.3	6.5	10.0	35.0	23	54	27
601 02 22	SSC-40-12	40.0	1.3	6.5	12.0	35.0	27	60	27
601 02 40	SSC-40-18	40.0	1.4	6.5	18.0	35.0	32	84	27
601 02 41	SSC-40-20	40.0	1.4	6.5	20.0	35.0	35	88	27
601 02 42	SSC-40-22	40.0	1.4	6.5	22.0	35.0	37	95	27
601 02 31	SSC-45-8	45.2	1.3	6.5	8.0	40.0	19	46	31
601 02 32	SSC-45-12	45.2	1.3	6.5	12.0	40.0	26	61	31
601 02 33	SSC-45-15	45.2	1.3	6.5	15.0	40.0	31	70	31
601 02 50	SSC-50-12	49.6	1.3	6.5	12.0	44.0	25	64	34
601 02 58	SSC-58-12	57.6	1.3	6.5	12.0	52.0	25	63	40

alle Maße in mm

