


Test Lead XPF-480/2G

Highly flexible test leads. One end with Ø 2 mm test probe made of stainless steel with a thread for use with screw-on acces-

sories, offering various contacting possibilities. The other end with in-line or right angled

Ø 4 mm MULTILAM plug with rigid insulating sleeve. Supplied with protective cap.

XPF-480/2G

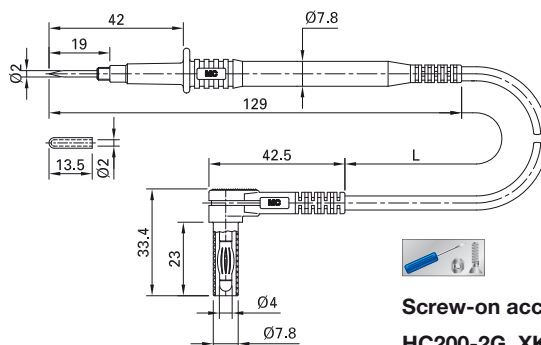


Screw-on accessories
HC200-2G, XKK-200-2G, see below

Order No.	Type	Rated voltage/current	Lead		Lead lengths L [cm]	*Colors
66.9645-□*	XPF-480/2G	1000 V, CAT II / 15 A	PVC 0,75 mm ²	Ni CE c UL US	100 150	21 22

Accessories


HC200-2G



Hook Clip with rigid hook. Grasped objects are pressed against the tip of the insulator under spring pressure. Internal thread for

attachment to the probes of the test leads XPF-480/2G, see above.

XKK-200-2G

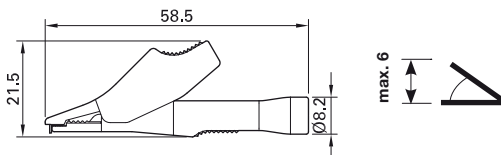

Test Clip with all-round insulation. Toothed gripping jaws with fine-wire clamping surface.

Internal thread for attachment to the probes of the test leads XPF-480/2G, see above.

Order No.	Type	Rated voltage/current		*Colors
66.9473-*	HC200-2G	1000 V, CAT II / 5 A	Ni CE	21 22
66.9091-*	XKK-200-2G	600 V, CAT II / 10 A	Ni CE	21 22