



Bravo Still 100
Bravo Still 125
Bravo Still 150



Bravo Still
Chrome

Bravo Still
Platinum

■ **Use:** _____

- Exhaust air fan

■ **Application:** _____

- Residential premises
- Flats, cottages
- Offices
- Utility spaces
- Trade premises
- Restaurants
- Job sites
- Health care facilities
- Child care facilities

■ **Options:** _____

Pull-cord switch

Pull-cord switch

Timer

Timer

- Time delay range from 2 to 30 min

Humidity sensor

Humidity

- Humidity level range from 50 to 90%
- Time delay range from 2 to 30 min

Motion sensor


Motion sensor

- Reach distance 1 to 4 m
- Sensor viewing angle up to 100°
- Time delay range from 2 to 30 min


■ **Features:** _____

- Wall and ceiling mounting
- Silent impeller
- Easy maintenance
- Long continuous work
- Back valve
- Ball bearing motor
- Decoration - Bravo Chrome, Bravo Platinum
- 5 years guarantee

Type	Pull-cord switch	Timer	Humidity sensor	Motion sensor
Bravo Still 100				
100 S	●			
100 T		●		
100 ST	●	●		
100 H				●
100 SH	●			●
100 IR				○
Bravo Still 125				
125 S	●			
125 T		●		
125 ST	●	●		
125 H				●
125 SH	●			●
125 IR				○
Bravo Still 150				
150 S	●			
150 T		●		
150 ST	●	●		
150 H				●
150 SH	●			●
150 IR				○

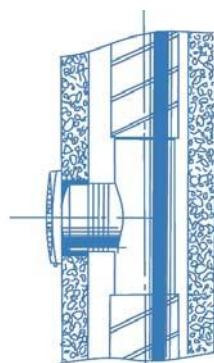


■ Overall and mounting dimensions

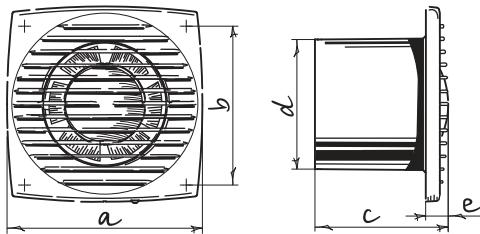

Type	Dimensions, mm				
	a	b	c	d	e
Bravo Still 100	150	122	102	100	17
Bravo Still 125	176	144	104	125	17
Bravo Still 150	205	174	124	150	19

■ Specifications

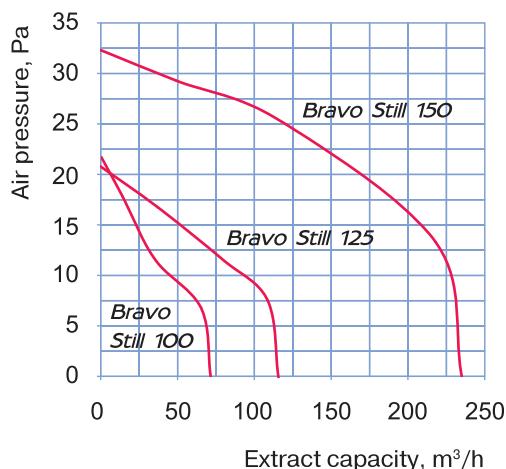

Parameters	Bravo Still 100	Bravo Still 125	Bravo Still 150
Voltage, V	220-240	220-240	220-240
Power, W	5,6	9,3	20
Extract capacity, m³/h	70	115	235
Noise level, dBA 3m	26	31	35



■ Packing

