



## Main

Range of product	Harmony XALF
Product or component type	Hoistway box
Device short name	XALF
Product specific application	Lift inspection
Operator profile	1 flush push-button
Operator description	Black bell symbol 1 NO
Contact operation	Slow-break

## Complementary

Material	Polycarbonate
Net weight	0.13 kg
Marking	CE
Contacts material	Silver alloy (Ag/Ni)

## Environment


Protective treatment	TH
Ambient air temperature for storage	-40...70 °C
Ambient air temperature for operation	0...50 °C
Standards	EN/IEC 60947-5-5 EN/IEC 60947-5-1 EN/IEC 60947-1 EN/IEC 60947-5-4 EN 81-20

## Packing Units


Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	6.4 cm
Package 1 Width	6.8 cm
Package 1 Length	6.8 cm
Package 1 Weight	124.0 g

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 <a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>
RoHS exemption information	 <a href="#">Yes</a>
Environmental Disclosure	 <a href="#">Product Environmental Profile</a>

Circularity Profile	<a href="#"> End Of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
<b>Contractual warranty</b>	
Warranty	18 months

## Dimensions

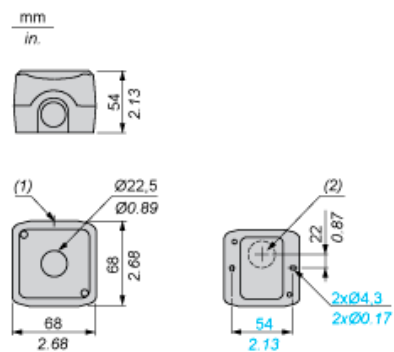

- (1) 2 knock-outs for Pg 13.5 cable gland, maximum capacity 12 mm / 0.47 in.  
(2) Knock-out for cable entry, maximum capacity 14 mm / 0.55 in.