


Data Sheet | Item Number: 2010-1207



2-conductor ground terminal block; 10 mm²; suitable for Ex e II applications; side and center marking; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®; 10,00 mm²; green-yellow



<https://www.wago.com/2010-1207>

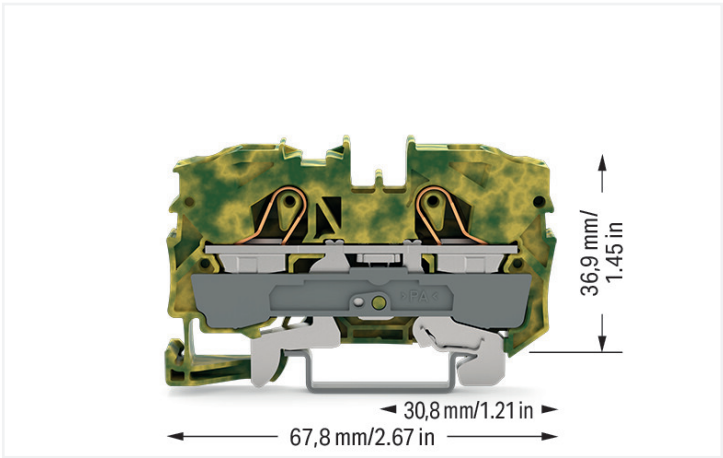

Color: green-yellow

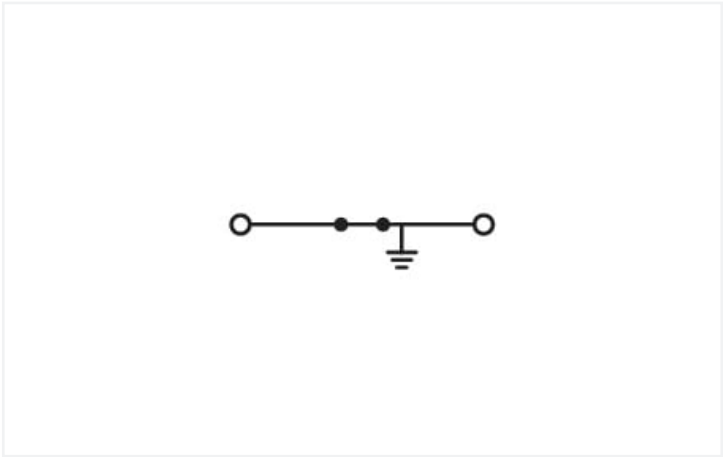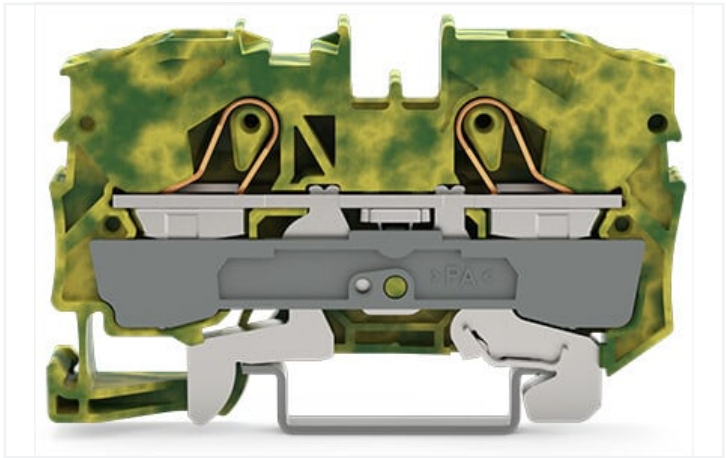

Similar to illustration

Electrical data		
Ratings per IEC/EN		Ex information
Ratings per	IEC/EN 60947-7-2	
Reference hazardous areas		

Connection data		
Connection points	2	<div>Connection 1</div> <div>Connection technology</div> <div>Push-in CAGE CLAMP®</div> <div>Actuation type</div> <div>Operating tool</div> <div>Connectable conductor materials</div> <div>Copper</div> <div>Nominal cross-section</div> <div>10 mm²</div> <div>Solid conductor</div> <div>0.5 ... 16 mm² / 20 ... 6 AWG</div> <div>Solid conductor; push-in termination</div> <div>4 ... 16 mm² / 14 ... 6 AWG</div> <div>Fine-stranded conductor</div> <div>0.5 ... 16 mm² / 20 ... 6 AWG</div> <div>Fine-stranded conductor; with insulated ferrule</div> <div>0.5 ... 10 mm² / 20 ... 8 AWG</div> <div>Fine-stranded conductor; with ferrule; push-in termination</div> <div>4 ... 10 mm² / 12 ... 8 AWG</div>
Total number of potentials	1	
Number of levels	1	
Number of jumper slots	2	

Connection 1

Note (conductor cross-section)	Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination.
Strip length	17 ... 19 mm / 0.67 ... 0.75 inches
Wiring direction	Front-entry wiring

Physical data

Width	10 mm / 0.394 inches
Height	67.8 mm / 2.669 inches
Depth from upper-edge of DIN-rail	36.9 mm / 1.453 inches

Mechanical Data

Mounting type	DIN-35 rail
Marking level	Center/side marking

Material Data

Note (material data)	Information on material specifications can be found here
Color	green-yellow
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.294 MJ
Weight	30.1 g

Environmental requirements

Processing temperature	-35 ... +85 °C
Continuous operating temperature	-60 ... +105 °C

Commercial data

Product Group	22 (TOPJOB S)
eCl@ss 10.0	27-14-11-41
eCl@ss 9.0	27-14-11-41
ETIM 8.0	EC000901
ETIM 7.0	EC000901
PU (SPU)	25 pcs
Packaging type	Box
Country of origin	DE
GTIN	4017332076180
Customs tariff number	85369010000

1 Compatible Products

1.1 Required Accessories

1.1.1 End plate

1.1.1.1 End plate



Item No.: 2010-1291
End and intermediate plate; 1 mm thick;
gray



Item No.: 2010-1292
End and intermediate plate; 1 mm thick;
orange



Item No.: 209-191
Separator for Ex e/Ex i applications; 3 mm
thick; 120 mm wide; orange