

Product data sheet

Miniature connectors



Product description **Push-Pull female panel mount connector, Contacts: 12, shieldable, solder, IP67 shielded**


Area **Push-Pull series 440**

Order number **09 4836 00 12**


Illustration



Scale drawing

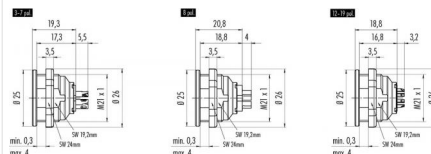

Contact arrangement



	X	Y
A	-0,44	-3,45
B	2,29	-3,61
C	4,10	-1,21
D	3,20	1,34
E	2,71	3,59
F	0,41	3,45
G	-2,29	3,61
H	-4,10	1,21
J	-3,20	-1,34
K	-2,71	-3,59
L	2,00	-1,51
M	-2,00	1,51

You can find the component part drawing and assembly instructions on the next page.

Technical data

General values

Connector design female panel mount connector

Connector locking system Push-Pull

Termination solder

Wire gauge (mm) 0.25 mm²

Wire gauge (AWG) 24

Upper limit temperature 85 °C

Lower limit temperature - 40 °C

Customs tariff number 85369010

Packaging Unit 15

Electrical values

Rated current (40 °C) 3 A

Rated voltage 60 V

Rated impulse voltage 500 V

Pollution degree 1

Overvoltage category I

Insulating material group III

Insulation resistance $\geq 10^{10} \Omega$

EMC compliance shieldable

Degree of protection IP67 shielded

Mechanical operation > 1000 Mating cycles

Material

Contact material CuSn (bronze)

Contact plating Au (gold)

Contact body material PBT (UL94 V-0)

Product description

Push-Pull female panel mount connector, Contacts: 12, shieldable, solder, IP67 shielded


Area

Push-Pull series 440


Order number

09 4836 00 12

Component part drawing

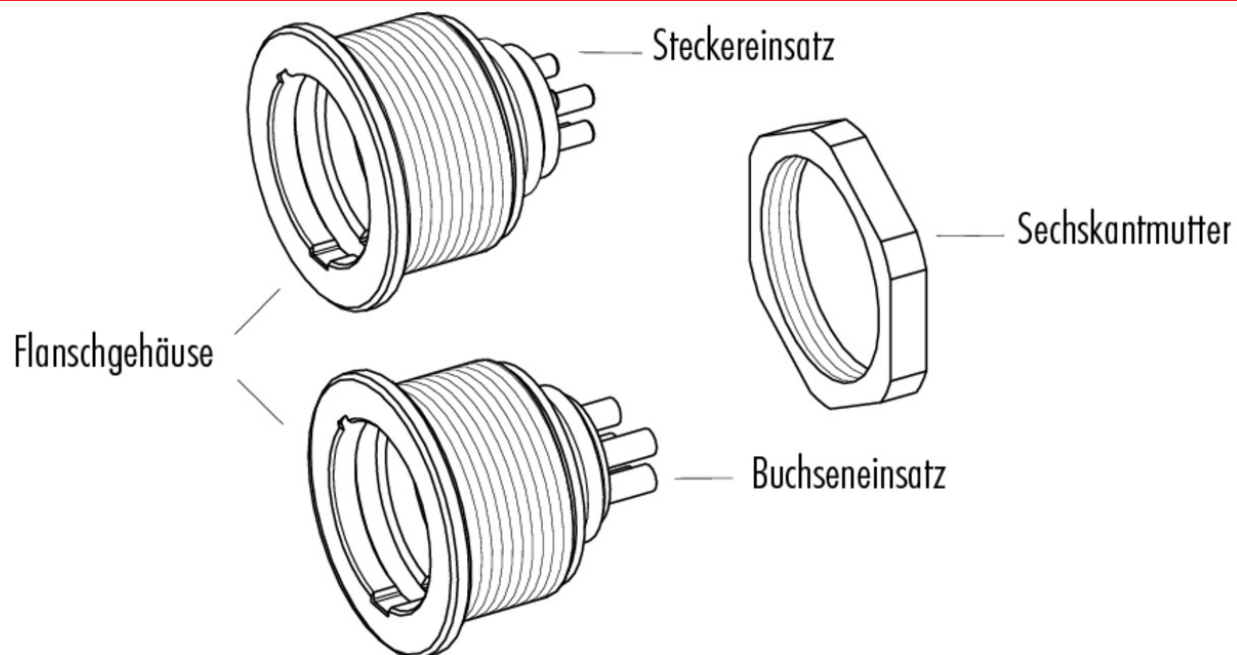

Assembly instructions / Panel cut-out

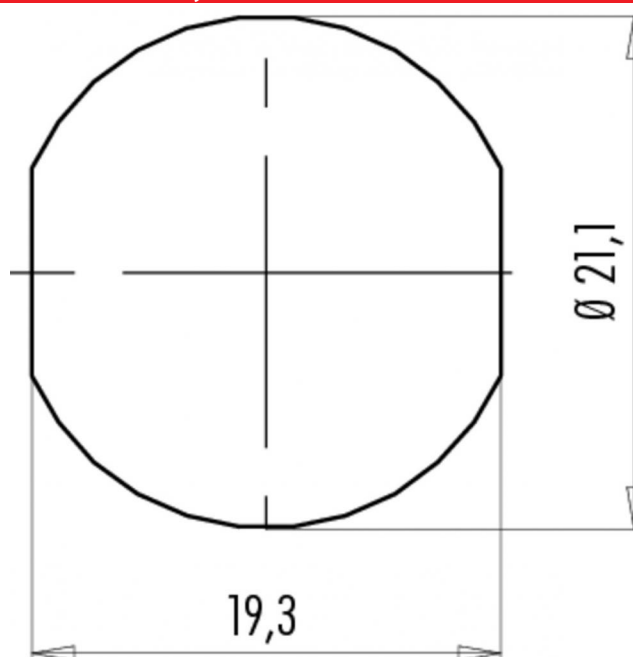

Product description	Push-Pull female panel mount connector, Contacts: 12, shieldable, solder, IP67 shielded
Area	Push-Pull series 440
Order number	09 4836 00 12

Security notices

The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.

Connectors with degree of protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the connectors must be separately protected against corrosion. For further information about IP degrees of protection refer to 'Technical support' in the Download Centre.