


GS1AF43

Auxiliary contact, TeSys GS, 1 C/O, 3P, 250 to 400A, fuse type DIN, size 1-2, for GS1 GS2 Blown fuse

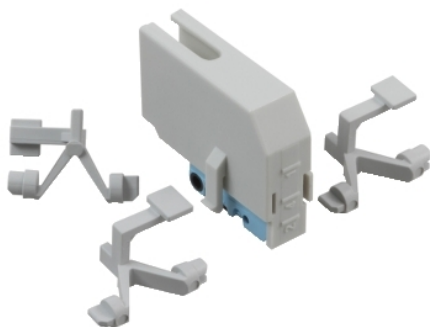

Main

Range of product	TeSys
Device short name	GS1AF
Product or component type	Auxiliary contact
Contact application	Blown fuse signalling
Contacts type and composition	1 C/O
Contact operation	Instantaneous
[I _{th}] conventional free air thermal current	16 A (at 40 °C)
[I _e] rated operational current	12 A at 24 V DC-13 2 A at 48 V DC-13 3 A at 400 V AC-15 4 A at 230 V AC-15 0.4 A at 220 V DC-13 0.6 A at 110 V DC-13




Complementary

Range compatibility	TeSys (TeSys GS) fuse-switch disconnecter
Mechanical durability	30000 cycles
Electrical durability	30000 cycles AC-15
Product compatibility	GS
Poles description	3P
Switch rated current	250 A 400 A
Fuse type	DIN NFC
Fuse size	2 1
Net weight	0.038 kg

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.5 cm
Package 1 Width	12.0 cm
Package 1 Length	15.0 cm
Package 1 Weight	38.0 g
Unit Type of Package 2	S01
Number of Units in Package 2	20
Package 2 Height	15.0 cm
Package 2 Width	15.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	992.0 g

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	 End Of Life Information

Contractual warranty

Warranty	18 months
----------	-----------