


GS1ANT22

Auxiliary contacts, TeSys GS, 2NC +2NO,
instantaneous, left side mounting, for GS2 with
front handle test position

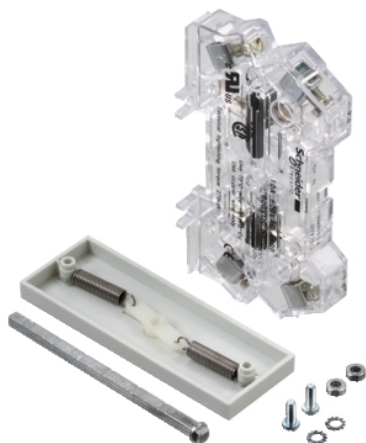

Main

Range of product	TeSys
Device short name	GS1AN
Product or component type	Auxiliary contact
Contact application	O, I and test position signalling
Contacts type and composition	2 NO + 2 NC
Contact operation	Instantaneous
[I _{th}] conventional free air thermal current	20 A (at 40 °C)
[I _e] rated operational current	1 A at 220 V DC-13 10 A at 230 V AC-15 12 A at 127 V AC-15 4 A at 48 V DC-13 6 A at 440 V AC-15 8 A at 400/415 V AC-15 1.2 A at 110 V DC-13




Complementary

Range compatibility	TeSys (TeSys GS) fuse-switch disconnecter
Mechanical durability	30000 cycles
Electrical durability	30000 cycles AC-15
Switch rated current	50 A 63 A 125 A 315 A 100 A 250 A 60 A 200 A 160 A 400 A
Fuse type	DIN BS NFC
Type of operating handle	External frontal
Net weight	0.258 kg

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.5 cm
Package 1 Width	7.0 cm
Package 1 Length	13.0 cm
Package 1 Weight	258.0 g
Unit Type of Package 2	S01
Number of Units in Package 2	12
Package 2 Height	15.0 cm
Package 2 Width	15.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	3.329 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	 End Of Life Information

Contractual warranty

Warranty	18 months
----------	-----------