




Terminals & Splices > Quick Disconnects

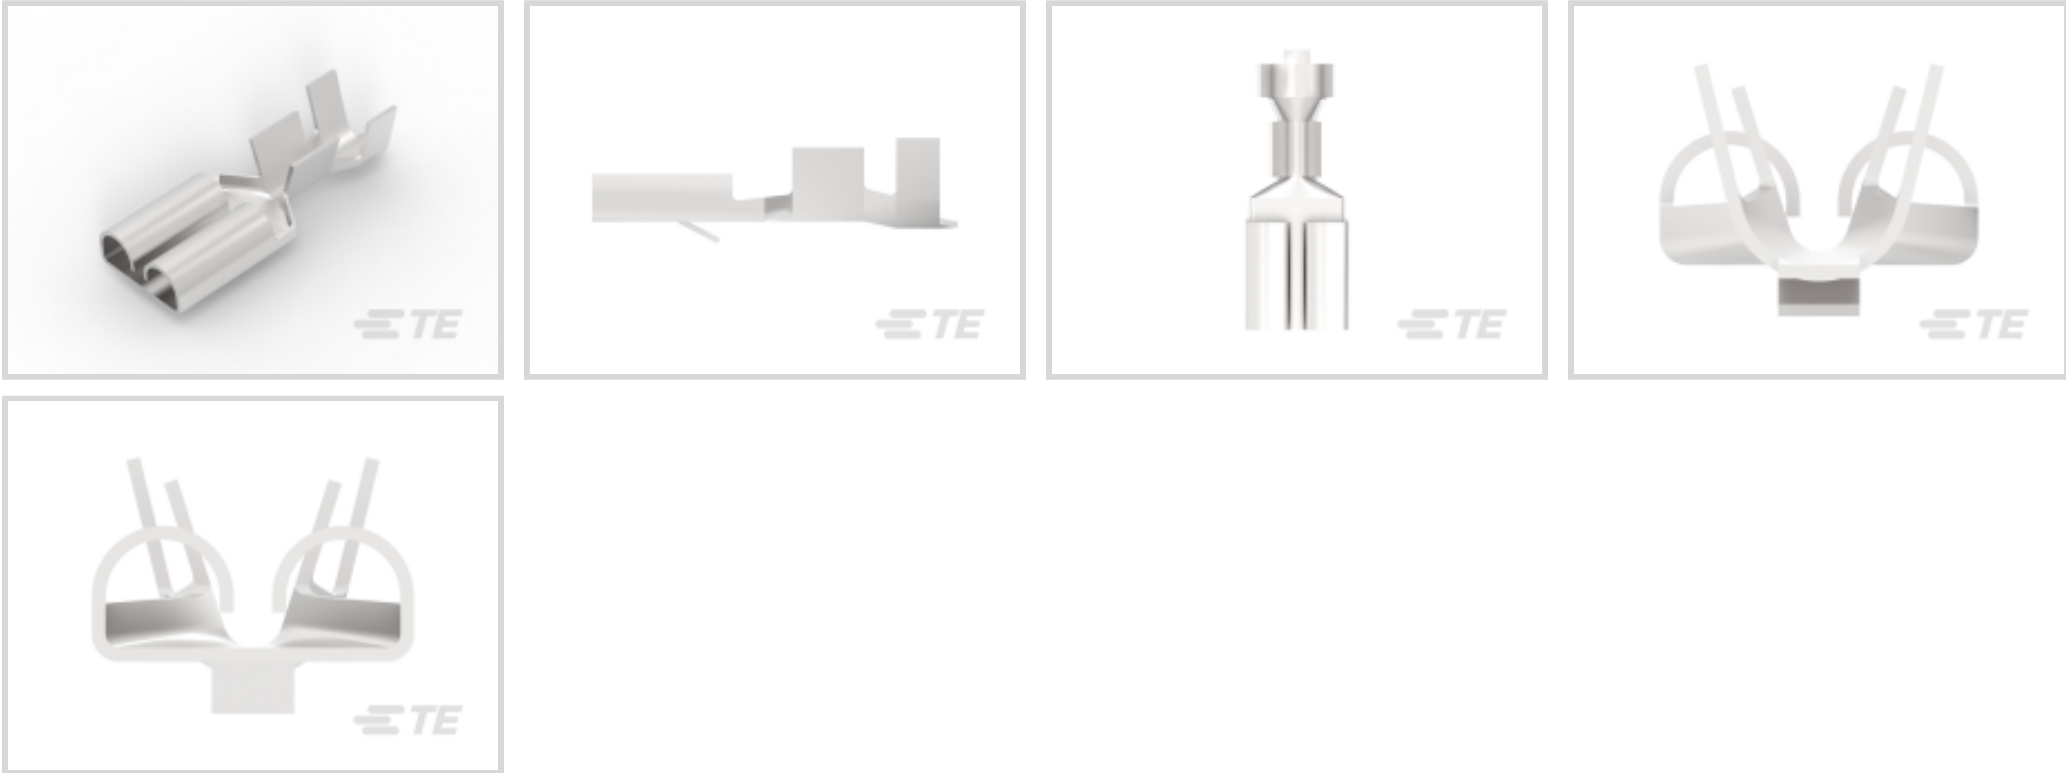

Terminal & Splice Type: **Receptacle**

Wire Size: **1.03 – 2.62 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Wire Stop	No
Wire/Cable Type	Regular Wire
Terminates To	Wire & Cable
Insertion Force	Normal
Sealable	No
Insulated	No

Configuration Features

Connection Capacity	Single
---------------------	--------

Body Features

Fully Insulated	No
Plating Material	Silver

Contact Features

Terminal Type	Receptacle
Terminal & Splice Type	Receptacle
Terminal Orientation	Straight



Contact Base Material	Phosphor Bronze
Crimp Type	F-Crimp
Barrel Type	Open

Mechanical Attachment

Mating Retention Type	Locking Lance
Locking Lance Height	1.2 mm[.05 in]
Wire Insulation Support	With

Dimensions

Accepts Wire Insulation Diameter Range	3.43 – 5.08 mm[.135 – .2 in]
Overall Length	19.2 mm[.755 in]
Receptacle Terminal Stock Thickness	.33 mm[.013 in]
Wire Size	1.03 – 2.62 mm²
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]

Usage Conditions

Operating Temperature Range	-40 – 130 °C[-40 – 266 °F]
-----------------------------	----------------------------

Packaging Features

Packaging Quantity	500
Packaging Method	Loose Piece/Carton

Other

Line	FASTON .250
------	-------------

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2020 (205) Candidate List Declared Against: JAN 2020 (205) Does not contain REACH SVHC
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2020 (205)



	Candidate List Declared Against: JAN 2020 (205)
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE’s information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) ‘Guidance on requirements for substances in articles’(Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of ‘complex object’, the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA “Guidance on requirements for substances in articles” (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts

TE Model / Part # 539731-2
DIE F6. 3FF

TE Model / Part # 539653-2
MATRIZE .250 FF

TE Model / Part # 4-1579007-3
EXTRACTION TOOL KIT

TE Model / Part # 1-1579007-4
EXTRACTION TOOL

TE Model / Part # 2063384-1
SDE COMMERCIAL TOOL & DIE

TE Model / Part # 2063384-2
SDE COMMERCIAL TOO DIE

Also in the Series | FASTIN-FASTON 250




Crimp Terminal Housings(214)



Quick Disconnects(253)

Customers Also Bought

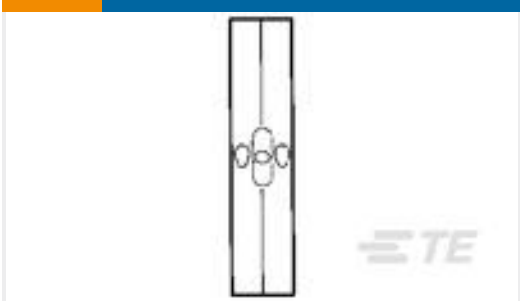

TE Model / Part #8-330368-1
SPLICE,SOLIS BUTT 16-14



TE Model / Part #064743-000
B-151-13




TE Model / Part #163307-4
MATE-N-LOK PIN



TE Model / Part #160458-3
FF 250 TAB 18-16AWG PB SILVER PL LP



TE Model / Part #925661-3
.140 DIA SOCKET

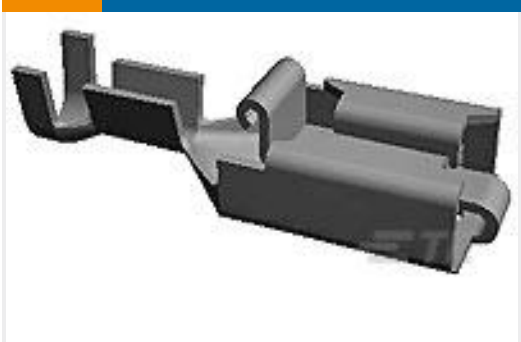

TE Model / Part #927882-8
POS LOCK RECEPTACLE 6,3



TE Model / Part #5-160447-3
FF 250 REC 1-2.5MM2 PB SILVER PLATED LP

Documents

Product Drawings

FF 250 REC 1-2.5MM2 PB SILVER PLATED LP

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_6-160449-3_U.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_6-160449-3_U.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_6-160449-3_U.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

6-160449-3

FASTIN-FASTON 250, Quick Disconnects, Receptacle, 17 – 13 AWG, 1.03 – 2.62 mm²,
Mating Tab Width 6.35 mm [.25 in]

