


Y-adapter audio cable 6.0mtr RYWCC060

YPK220 Microphone Cable


Patch Cable, O.D. 4.3 mm, 0.22 mm² / AWG 24

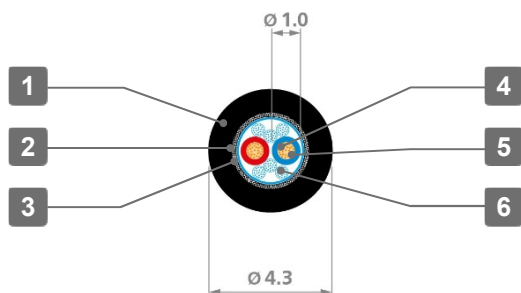

1 Jacket
2 Spiral Shield

3 Paper Tissue
4 Conductor

5 Conductor Insulation
6 Filler Cord

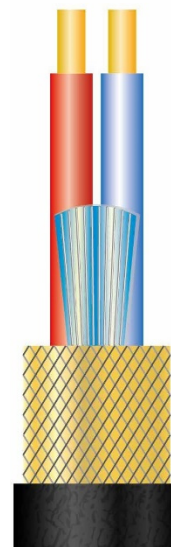

MECHANICAL SPECIFICATION

Composition of conductor	28 x 0.10 mm / 28 x AWG 38 bare annealed copper, OFC standard
Conductor insulation	LD-PE Ø 1.0 mm
Conductor color	Red & Blue
Composition of core	2 twisted cores 40 mm one turn, left hand
Spiral shield	63 x 0.10 mm bare annealed copper, OFC standard Coverage > 90 %
Overall jacket material	PVC with restricted Substance: Cadmium: < 5 PPM ("Cadmium free") Lead: < 50 PPM Mercury: < 2 PPM Chromium: Not contained
Jacket colour	Black (other colours on request)
Overall diameter	Ø 4.3 mm tolerance: +/- 0.2 mm
Working temperature - Mobile - Fixed	-5 °C to +70 °C -20 °C to +70 °C
Cable Printing	- Standard cable print - Customer cable print on request


ELECTRICAL SPECIFICATION

Conductor DC resistance	≤ 80 m ^Ω / m – 20 °C
Screen DC resistance	≤ 40 m ^Ω / m – 20 °C
Insulation resistance	> 1 G ^Ω / km – 20 °C, 500 V _{DC}
Capacitance Conductor to Conductor	≤ 80 pF / m – 1 KHz
Capacitance Conductor to Screen	≤ 140 pF / m – 1 KHz
Test voltage: Conductor to Conductor	500 V _{eff} – 50 Hz, 1 Minute
Test voltage: Conductor / Screen	1.000 V _{eff} – 50 Hz, 1 Minute

3.5 mm Plugs



RTP3C



RTP3C

FEATURES

- *Valuable and slim design with ergonomic finger groove – space saving and handy*
- *Rugged all metal housing – reliable and robust*
- *Heavy duty cable clamp – best strain relief*
- *3.5mm plug 3 pole, nickel shell, nickel plated contacts*

CONNECTOR

Type No.	Description
RTP3C	3.5mm plug, 3 pole, nickel shell, nickel plated contacts

REAN®

3.5 mm Plugs

TECHNICAL DATA

ELECTRICAL

<i>Rated current per contact</i>	<i>depends on mating connector</i>
<i>Contact resistance</i>	<i>depends on mating connector</i>
<i>Insulation resistance</i>	> 1.5 G\wedge
<i>Dielectric strength</i>	1 kV dc

MECHANICAL

<i>Lifetime</i>	> 1'000 mating cycles
<i>Cable O.D. range</i>	2.0–4.0 mm
<i>Wiring</i>	solder contact

MATERIAL

<i>Contacts</i>	Brass (CuZn39Pb3)
<i>Contact plating</i>	Ag
<i>Shell (housing)</i>	ZnAl4Cu1
<i>Shell plating</i>	Ni
<i>Strain relief</i>	POM

ENVIRONMENTAL

<i>Operating temperature</i>	-20°C to +70°C
<i>Solderability</i>	complies with IEC68-2-20

Data subject to change without prior notice. © 2017 REAN® is a registered trademark of the Neudirk Group. ALL RIGHTS RESERVED.

REAN®

2 x Phono "RCA / Cinch" Connector



FEATURES

- *Attractive and slim design with ergonomic finger groove – space saving and convenient to handle*
- *Rugged zinc diecast shell – long lasting and reliable*
- *Chuck type strain relief – best cable retention, easy to assemble*
- *Gold plated contacts – for best conductivity and durability*
- *Rubber boot kink protection – guarantees best cable protection and offers long cable life*

CONNECTOR

Type No.	Description
<i>RF2C-AU-0</i>	<i>RCA plug, nickel shell, gold plated contacts, black boot</i>
<i>RF2C-AU-2</i>	<i>RCA plug, nickel shell, gold plated contacts, red boot</i>

REAN[®]

Phono "RCA / Cinch" Connector

TECHNICAL DATA

ELECTRICAL

Rated current	depends on mating connector
Contact resistance	depends on mating connector
Insulation resistance	$\geq 1 \text{ G}\Omega$
Dielectric strength	1 kV dc

MECHANICAL

Lifetime	> 1'000 mating cycles
Insertion / withdrawal force	$\leq 20 \text{ N} / \geq 10 \text{ N}$
Cable O.D.	4.0–6.0 mm

MATERIAL

Contacts	Brass (CuZn39Pb3)
Contact plating	AU
Insert	PA 6 30% GR
Shell (housing)	ZnAl4Cu1
Shell (plating)	Ni
Strain relief	PA 6

ENVIRONMENTAL

Operating temperature	-20°C to +70°C
Solderability	complies with IEC68-2-20

Data subject to change without prior notice. © 2017 REAN® is a registered trademark of the Neutrik Group. ALL RIGHTS RESERVED.

REAN®