

DVI Cable with very good electromagnetic shielding

DVI AOC Fiber Optic Cable



Long distance transmission, over 300 meters
Thinner and lighter than conventional copper cable
No radiation, and highly resistant with EMI
No external power supply needed
Program and store monitor's EDID information inside of source connector
USB cable (0.5m) included in delivery
Supports resolution up to: 1920 x 1080 (1080P)




Stock lengths: 30 - 40 - 50 m

Art.-No.	Description	Colour
K5434AOC.x	DVI-D AOC Fiber Optic Cable, 2x DVI-D 24+1, M-M	black

DVI 18+1 Single Link Industrial Connection Cable

Shielding: foil + braiding
Conductor: bare copper, Jacket: PVC
Plugs and contacts gold plated,
housing with full-metal shielding and moulded, for ideal shielding characteristics in rough industrial environment.
Both sides assembled with ferrite core to dejam signals in the cable (for better EMC characteristics)
Single link cable
Support for resolution up to 1920 x 1200

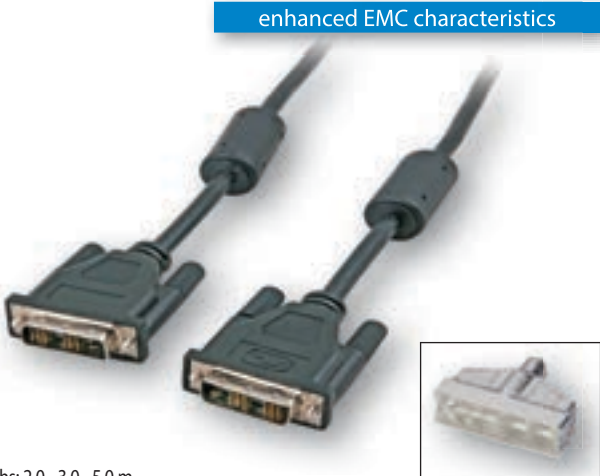


Stock lengths: 2.0 - 3.0 - 5.0 m

Art.-No.	Description	Colour
K5433IND.x	DVI Single Link Industrial Cable, 18+1, M-M	black

DVI 24+1 Dual Link Industrial Connection Cable

Shielding: foil + braiding
Conductor: bare copper, Jacket: PVC
Plugs and contacts gold plated,
housing with full-metal shielding and moulded, for ideal shielding characteristics in rough industrial environment.
Both sides assembled with ferrite core to dejam signals in the cable (for better EMC characteristics)
Dual link cable
Support for resolution up to 2560 x 1600

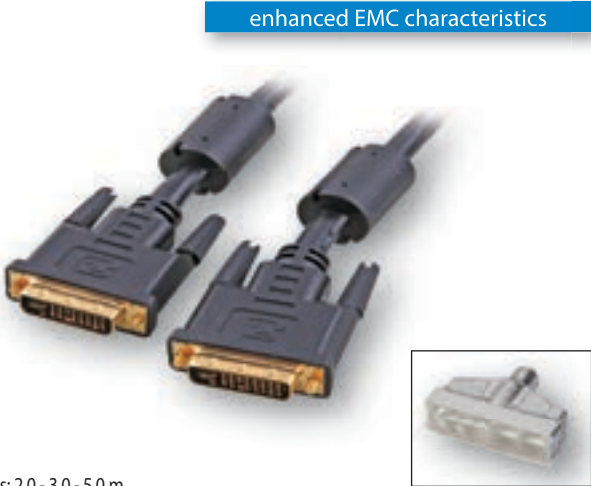

Stock lengths: 2.0 - 3.0 - 5.0 m

Art.-No.	Description	Colour
K5434IND.x	DVI Dual Link Industrial Cable, 24+1, M-M, AWG28	black

FIBER OPTIC

COPPER

CABINET SYSTEMS

MULTIMEDIA

ACTIVE COMPONENTS