


TECHNICAL DATA

Fluke STL120-III Shielded Test Leads Set

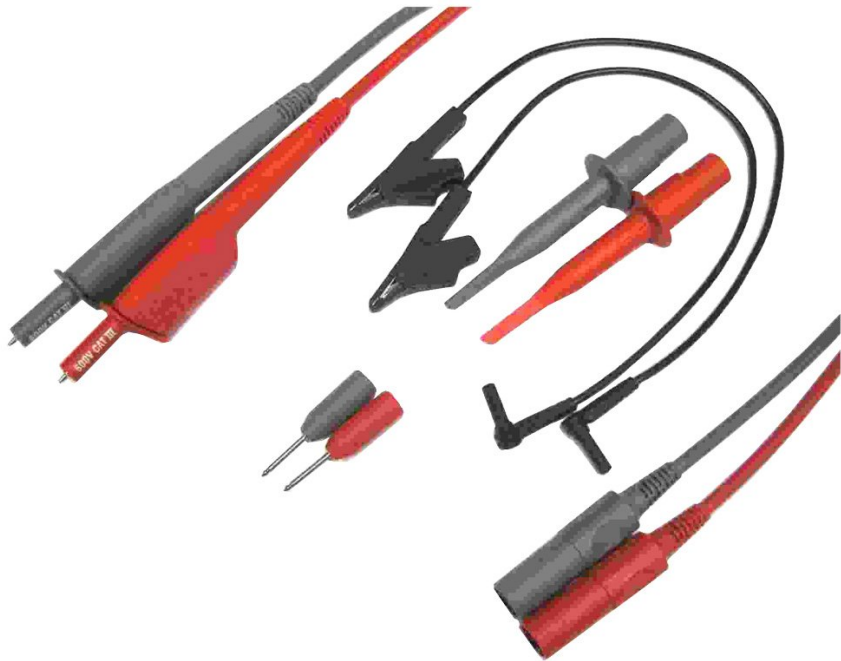

Product overview: Fluke STL120-III Shielded Test Leads Set

Set of two (one red, one gray) double insulated silicone shielded test leads for noise free measurements.

Specially designed for use with the Fluke ScopeMeter 120 Series. Compatible with AC120 Alligator Clips and HC120 Hook Clips. Safety designed ground leads included. Integral strain relieve and extra hard probe tips provide extra long service life. Features safety designed shrouded plugs and notched tip to prevent probe from sliding.

Specifications: Fluke STL120-III Shielded Test Leads Set

Specifications	
Bandwidth	12,5 MHz
Maximum signal voltage	600 V rms CAT III per IEC 61010-031:2008
Maximum voltage to ground	600 V rms CAT III per IEC 61010-031:2008
Maximum vcurrent	1 A
2 mm add-on testpin	600 V CAT II per IEC 61010-031:2008
Length	1.2 m (48)

## Ordering information



### **Fluke STL120 III**

Shielded Test Leads Set

---

**Fluke.** *Keeping your world up and running.®*

**Fluke (UK) Ltd.**  
52 Hurricane Way  
Norwich, Norfolk  
NR6 6JB  
United Kingdom  
Tel.: +44 (0)20 7942 0708  
E-mail: [cs.uk@fluke.com](mailto:cs.uk@fluke.com)  
[www.fluke.com/en-gb](http://www.fluke.com/en-gb)

©2023 Fluke Corporation. All rights reserved.  
Data subject to alteration without notice.  
01/2023

**Modification of this document is not permitted  
without written permission from Fluke Corporation.**