



Harnessing > Interconnect Devices > SolderSleeve Shield Terminators



Product Type: **Shield Terminator**
Operating Temperature (Max): **150 °C**
Expanded Inside Diameter (Min): **5.95 mm [6.45 in]**
Recovered Inside Diameter (Max): **3.3 mm [.13 in]**
Pre-Installed Lead: **Yes**

Features

Product Type Features

Splice Type	Shield Terminator
Temperature Indicator Type	None
Temperature Indicator	None
Product Type	Shield Terminator

Configuration Features

Pre-Installed Lead Type	AS22759/32
Pre-Installed Lead	Yes

Body Features

Lead Color	White/Black
Lead Plating Material	Tin
Lead Stranding	Stranded

Termination Features

Termination Method	Solder
--------------------	--------

Dimensions

Pre-Installed Lead Wire Size	.24 mm²
Shield Outside Diameter (Min)	3.3 mm[.13 in]
Overall Length	19.1 mm[.75 in]
Jacket Outside Diameter	5.95 mm[.235 in]



Expanded Inside Diameter (Min)	5.95 mm[6.45 in]
Recovered Inside Diameter (Max)	3.3 mm[.13 in]

Usage Conditions

Operating Temperature (Max)	150 °C
Resistance Properties	Immersion Protection
Wire Temperature (Max)	150 °C

Industry Standards

Government Qualified	No
MIL/NAS Specification (MIL-S-83519, NAS-1747)	RT-1404

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUN 2020 (209) Candidate List Declared Against: JAN 2020 (205) Does not contain REACH SVHC
Halogen Content	Out of Scope - excluded from Halogen requirements
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Model / Part # CJ2087-000
[HL2010E-KIT-120V](#)

Customers Also Bought




TE Model / Part #063749-000
[ST63-2-55-24-90](#)




TE Model / Part #314819-000
[ST63-3-55-24-90](#)




TE Model / Part #848929-000
[ST63-1-55-24-90](#)

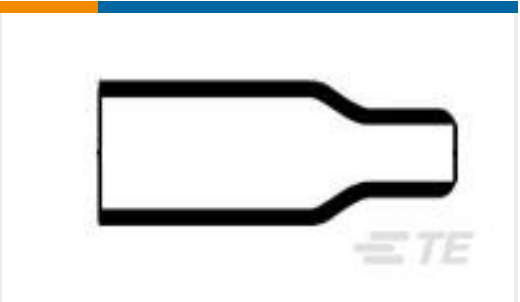

TE Model / Part #737451-000
[202A111-25-G06/225-0](#)

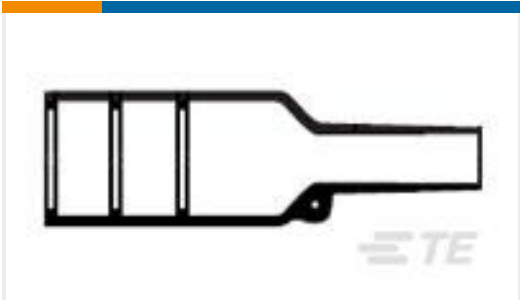

TE Model / Part #E47277-000
[202K111-25-G14-0](#)

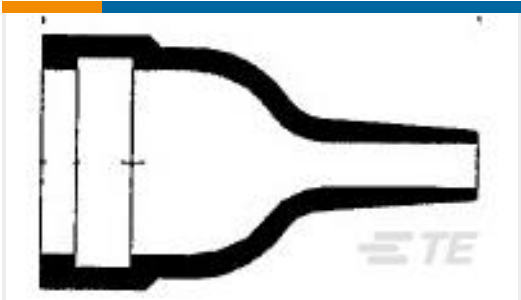

TE Model / Part #D06723-000
[204W221-12-0](#)



TE Model / Part #2162553001
[55A0111-14-1](#)



TE Model / Part #2161233001
[55A0111-16-7](#)



TE Model / Part #2162613001
[55A0111-16-8](#)



TE Model / Part #2161403001
[55A0111-18-3](#)

Documents

Product Drawings

[ST63-4-55-24-90](#)

English

Datasheets & Catalog Pages

[Raychem Electrical Interconnect Products](#)

English

Product Specifications

[Product Specification](#)

ST63-4-55-24-90

SolderSleeve Shield Terminators, Shield Terminator, Operating Temperature (Max)
150 °C, Expanded Inside Diameter (Min) 5.95 mm [6.45 in]



English