
PX0415/1 Datasheet



Product Name // Rewireable Flex SMB Connector For RG-174 Cable



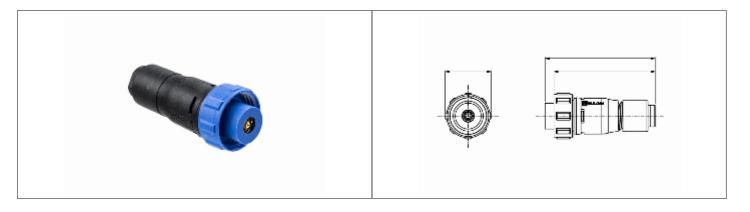

// Product Description:

- Rewireable SMB Connector
- O Water and dustproof to IP68 when mated with compatible
- O Frequency range 0-4GHz
- O Supplied with 50 Ohm impedance SMB plug
- For RG-174 cable

- O 14319 hand crimp tool available separately
- Pre-wired connector also available (PX0416)
- PX0481 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with Panel connector PX0414

// General Information:

Product Display Title: Product Family: Product Series: Approvals: Body Material:

Body Material Type: Contact Type: Coupling Type:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function: lp Rating:

Max Cable Entry Size:
Min Cable Entry Size:
Max Operating Temperature:
Min Operating Temperature:
Number Of Contacts:

Rewireable SMB Connector Circular Data Connectors 400 Series - SMB Buccaneer

CSA, UL, VDE

Polyamide (PA) Plastic Body Plug Contact Screw 19.1mm

Flex Cable Connector

IP68, IP69K 3mm 2.5mm +80°C -40°C 1 Contact

UL94V-0

