




Relays, Contactors & Switches > Relays > Power Relays

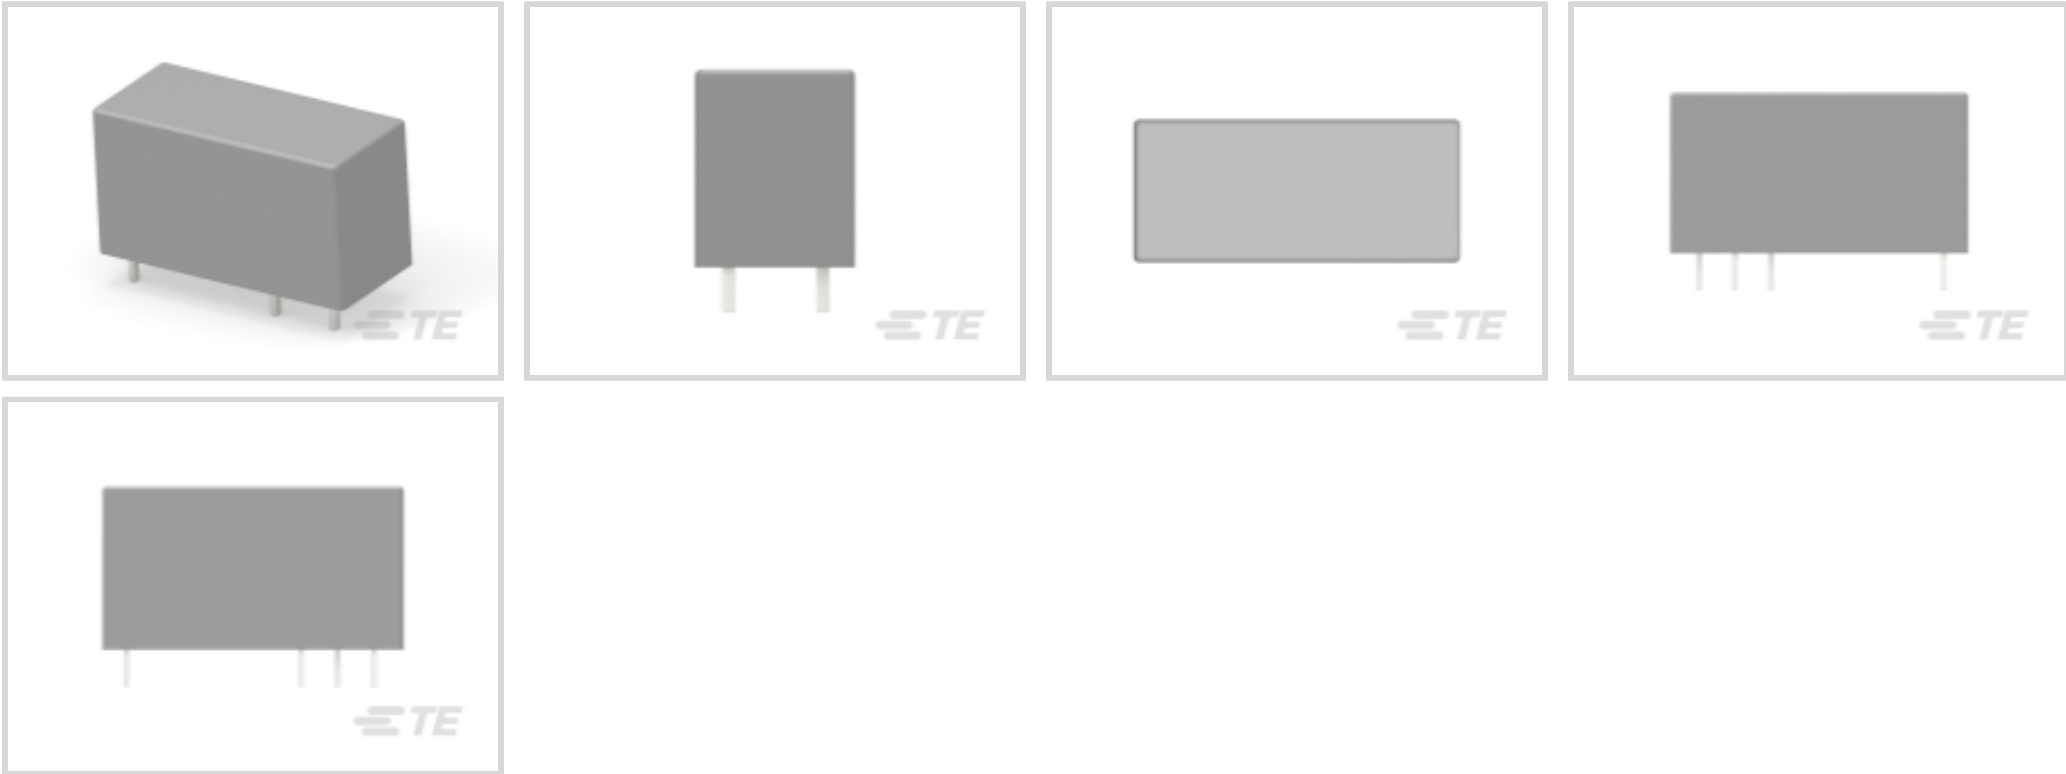

Power Relay Type: **Standard**  
Coil Magnetic System: **Monostable, DC**  
Coil Power Rating Class: **300 – 400 mW**  
Coil Power Rating DC: **400 mW**  
Coil Resistance: **1440 Ω**

Features

Product Type Features

Power Relay Type	Standard
------------------	----------

Electrical Characteristics

Insulation Initial Dielectric Between Coil & Contact Class	4000 – 5000 V
Insulation Initial Dielectric Between Open Contacts	1000 Vrms
Contact Limiting Making Current	25 A
Insulation Creepage Class	8 mm
Contact Limiting Continuous Current	12 A
Insulation Initial Dielectric Between Contacts & Coil	5000 Vrms
Insulation Creepage Between Contact & Coil	10 mm[.394 in]
Contact Limiting Breaking Current	12 A
Coil Magnetic System	Monostable, DC
Coil Power Rating Class	300 – 400 mW
Coil Power Rating DC	400 mW
Coil Resistance	1440 Ω



Coil Special Features	UL Coil Insulation Class F
Coil Voltage Rating	24 VDC
Contact Switching Voltage (Max)	400 VAC
Contact Voltage Rating	250 VAC

Body Features

Insulation Special Features	Tracking Index of Relay Base PTI250
Product Weight	14 g[.494 oz]

Contact Features

Contact Arrangement	1 Form C (CO)
Contact Current Class	10 – 20 A, 16 A
Contact Current Rating (Max)	12 A
Contact Material	AgNi90/10
Contact Number of Poles	1
Relay Terminal Type	PCB-THT, Plug-In

Mechanical Attachment

Relay Mounting Type	Printed Circuit Board, Socket
---------------------	-------------------------------

Dimensions

Length Class (Mechanical)	25 – 30 mm
Insulation Clearance Class	8 mm
Height Class (Mechanical)	15 – 16 mm
Insulation Clearance Between Contact & Coil	10 mm[.394 in]
Width Class (Mechanical)	12 – 16 mm
Product Width	12.7 mm[.5 in]
Product Length	29 mm[1.142 in]
Product Height	15.7 mm[.618 in]

Usage Conditions

Environmental Ambient Temperature (Max)	85 °C[185 °F]
---	---------------

Packaging Features

Packaging Method	Carton, Tube
------------------	--------------

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>




EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts




TE Part # 5-1415036-1  
PTML0024




TE Part # 9-1415036-1  
PTMT00A0




TE Part # 8-1415035-1  
RT78724




TE Part # 2022103-1  
RT17017




TE Part # 1419108-3  
RT114024F



TE Part # 2-1415036-1  
PTMG0024



TE Part # 6-1415036-1  
PTML0524



TE Part # 3-1415036-1  
PTMG0524





TE Part # 1415037-1  
PTMT00LO



TE Part # 1415540-8  
RT28816



TE Part # 1415539-4  
RT114024WG




TE Part # 8-1415036-1  
PTML1024



TE Part # 1860990-1  
RT78601, RELAY SOCKET PCB 3.5MM

Also in the Series | SCHRACK Power PCB Relay RT1

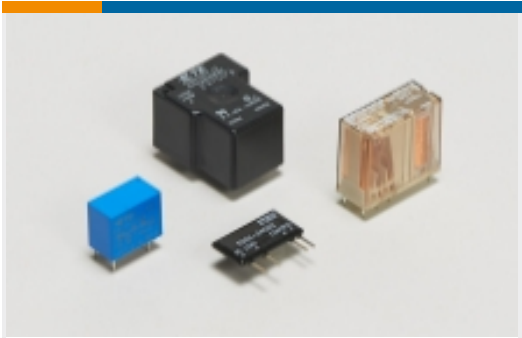


Power Relays(220)

Customers Also Bought



TE Part #2205064-2  
CA MICRO-MATCH MOW-MOW 12POS

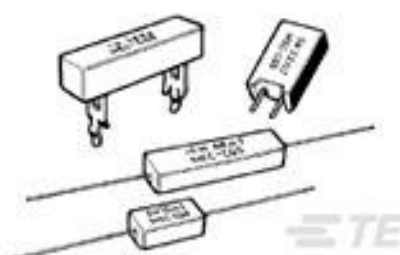

TE Part #1623788-4  
SQM5 12R 5% (WIRE)



TE Part #2-1761711-3  
IDC LOW PRO HDR 10P VERT LG LA



TE Part #7-1676481-0  
CPF 0603 5K1 0.1% 25PPM 1K RL



TE Part #1-1614881-9  
CPF0603 75K 0.1% 25PPM



TE Part #1-1879502-4  
CRGH2512 5% 47K 2W



TE Part #1415039-1  
RTH34024

TE Part #172034-1  
MIC CAP 11P V



Documents

CAD Files

Customer View Model

ENG\_CVM\_CVM\_1-1393239-3\_F.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-1393239-3\_F.3d\_stp.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-1393239-3\_F.2d\_dxf.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Lighting Relays Guide

English

Power PCB Relay RT1

English

Product Specifications

Definitions General Purpose Relays

English

Agency Approvals

VDE Certificate

English