





Color:  gray

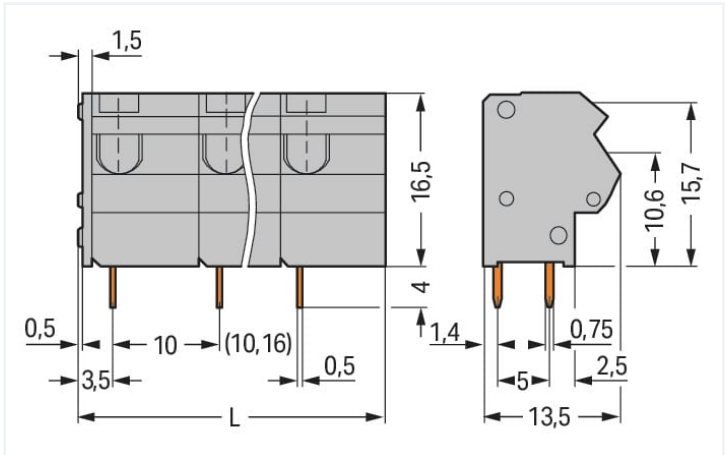

Dimensions in mm  
 $L = (\text{pole no.} \times \text{pin spacing}) + 1.5 \text{ mm}$

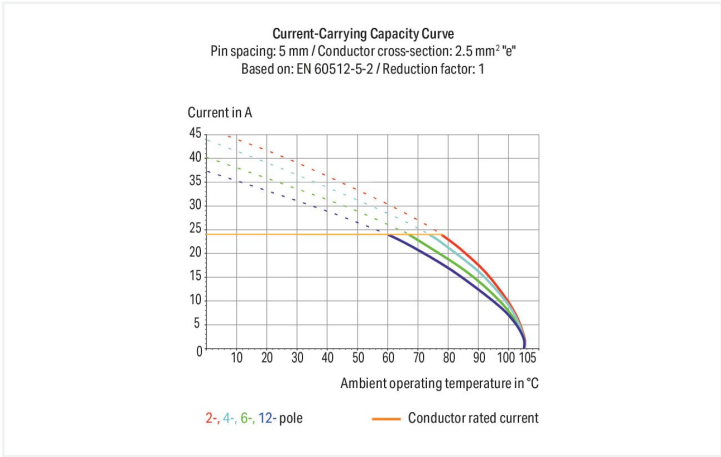

- PCB terminal strips with screwdriver-actuated PUSH WIRE® termination
- Push-in termination of solid and ferruled, fine-stranded conductors
- Test socket for 2 mm Ø test plug
- Save space on the PCB, just 8.9 mm deep

Notes	
Variants:	Other pole numbers Other colors Mixed-color PCB connector strips Direct marking Versions for Ex i Other versions (or variants) can be requested from WAGO Sales or configured at <a href="https://configurator.wago.com/">https://configurator.wago.com/</a> .

Electrical data			
Ratings per IEC/EN		Ratings per IEC/EN	
Ratings per	IEC/EN 60664-1	Rated current	24 A
Nominal voltage (III/3)	630 V	Legend (ratings)	(III / 2) ≙ Overvoltage category III / Pollution degree 2
Rated impulse voltage (III/3)	8 kV		
Rated voltage (III/2)	1000 V		
Rated impulse voltage (III/2)	8 kV		
Nominal voltage (II/2)	1000 V		
Rated surge voltage (II/2)	8 kV		



Ratings per UL 1059	
Approvals per	UL 1059
Rated voltage UL (Use Group B)	300 V
Rated current UL (Use Group B)	10 A
Rated voltage UL (Use Group D)	300 V
Rated current UL (Use Group D)	10 A

Ratings per CSA	
Approvals per	CSA
Rated voltage CSA (Use Group B)	300 V
Rated current CSA (Use Group B)	10 A
Rated voltage CSA (Use Group D)	300 V
Rated current CSA (Use Group D)	10 A

Connection data

Connection points	6
Total number of potentials	6
Number of connection types	1
Number of levels	1

Connection 1	
Connection technology	PUSH WIRE®
Actuation type	Operating tool
Solid conductor	0.5 ... 2.5 mm² / 20 ... 12 AWG
Fine-stranded conductor; with insulated ferrule	0.5 ... 1.5 mm²
Fine-stranded conductor; with uninsulated ferrule	0.5 ... 1.5 mm²
Note (conductor cross-section)	12 AWG: THHN, THWN
Strip length	10 ... 12 mm / 0.39 ... 0.47 inches
Conductor connection direction to PCB	45 °
Pole number	6

Physical data

Pin spacing	10/10.16 mm / 0.394/0.4 inches
Width	61.5 mm / 2.421 inches
Height	19.7 mm / 0.776 inches
Height from the surface	15.7 mm / 0.618 inches
Depth	13.5 mm / 0.531 inches
Solder pin length	4 mm
Solder pin dimensions	0.5 x 0.75 mm
Drilled hole diameter with tolerance	1.1 (+0.1) mm





PCB contact

PCB contact	THT
Solder pin arrangement	over the entire terminal strip (in-line)
Number of solder pins per potential	2

Material Data

Note (material data)	<a href="#">Information on material specifications can be found here</a>
Color	gray
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E <sub>Cu</sub> )
Contact plating	Tin
Fire load	0.186 MJ
Weight	9.3 g



Environmental requirements		
Limit temperature range	-60 ... +105 °C	
Commercial data		
Product Group	4 (Printed Circuit Connectors)	
eCl@ss 10.0	27-44-04-01	
eCl@ss 9.0	27-44-04-01	
ETIM 8.0	EC002643	
ETIM 7.0	EC002643	
PU (SPU)	80 (20) pcs	
Packaging type	Box	
Country of origin	PL	
GTIN	4044918941068	
Customs tariff number	85369010000	
Approvals / Certificates		
General approvals	Approvals for marine applications	
		
Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 60947	NTR NL 7375
CSA DEKRA Certification B.V.	C22.2	70154033
UR Underwriters Laboratories Inc.	UL 1059	E45172
Approval	Standard	Certificate Name
ABS American Bureau of Ship- ping	-	14-HG1241537-PDA
BV Bureau Veritas S.A.	IEC 60998	11915/D0 BV
DNV GL Det Norske Veritas, Ger- manischer Lloyd	-	TAE000016Z
Downloads		
Environmental Product Compliance		
Compliance Search		
Environmental Product Compliance 254-656		
Documentation		
Additional Information		
Technical Section	03.04.2019	pdf 1949.09 KB 
CAD/CAE-Data		



CAD data
2D/3D Models 254-656



CAE data
EPLAN Data Portal 254-656



ZUKEN Portal 254-656



1 Compatible Products

1.1 Optional Accessories

1.1.1 Ferrule

1.1.1.1 Ferrule



[Item No.: 216-241](#)  
Ferrule; Sleeve for 0.5 mm² / 20 AWG; in-  
sulated; electro-tin plated; electrolytic  
copper; gastight crimped; acc. to DIN  
46228, Part 4/09.90; white



[Item No.: 216-201](#)  
Ferrule; Sleeve for 0.5 mm² / 20 AWG; in-  
sulated; electro-tin plated; white



[Item No.: 216-221](#)  
Ferrule; Sleeve for 0.5 mm² / 20 AWG; in-  
sulated; electro-tin plated; white



[Item No.: 216-141](#)  
Ferrule; Sleeve for 0.5 mm² / 20 AWG; un-  
insulated; electro-tin plated; electrolytic  
copper; gastight crimped; acc. to DIN  
46228, Part 1/08.92



[Item No.: 216-101](#)  
Ferrule; Sleeve for 0.5 mm² / AWG 22; un-  
insulated; electro-tin plated; silver-colo-  
red



[Item No.: 216-121](#)  
Ferrule; Sleeve for 0.5 mm² / AWG 22; un-  
insulated; electro-tin plated; silver-colo-  
red



[Item No.: 216-242](#)  
Ferrule; Sleeve for 0.75 mm² / 18 AWG; in-  
sulated; electro-tin plated; electrolytic  
copper; gastight crimped; acc. to DIN  
46228, Part 4/09.90; gray



[Item No.: 216-262](#)  
Ferrule; Sleeve for 0.75 mm² / 18 AWG; in-  
sulated; electro-tin plated; electrolytic  
copper; gastight crimped; acc. to DIN  
46228, Part 4/09.90; gray



[Item No.: 216-202](#)  
Ferrule; Sleeve for 0.75 mm² / 18 AWG; in-  
sulated; electro-tin plated; gray



[Item No.: 216-222](#)  
Ferrule; Sleeve for 0.75 mm² / 18 AWG; in-  
sulated; electro-tin plated; gray



[Item No.: 216-142](#)  
Ferrule; Sleeve for 0.75 mm² / 18 AWG;  
uninsulated; electro-tin plated; electroly-  
tic copper; gastight crimped; acc. to DIN  
46228, Part 1/08.92



[Item No.: 216-102](#)  
Ferrule; Sleeve for 0.75 mm² / AWG 20;  
uninsulated; electro-tin plated; silver-co-  
lored



[Item No.: 216-122](#)  
Ferrule; Sleeve for 0.75 mm² / AWG 20;  
uninsulated; electro-tin plated; silver-co-  
lored



[Item No.: 216-243](#)  
Ferrule; Sleeve for 1 mm² / AWG 18; insu-  
lated; electro-tin plated; electrolytic cop-  
per; gastight crimped; acc. to DIN 46228,  
Part 4/09.90; red



[Item No.: 216-263](#)  
Ferrule; Sleeve for 1 mm² / AWG 18; insu-  
lated; electro-tin plated; electrolytic cop-  
per; gastight crimped; acc. to DIN 46228,  
Part 4/09.90; red



[Item No.: 216-203](#)  
Ferrule; Sleeve for 1 mm² / AWG 18; insu-  
lated; electro-tin plated; red



[Item No.: 216-223](#)  
Ferrule; Sleeve for 1 mm² / AWG 18; insu-  
lated; electro-tin plated; red



[Item No.: 216-103](#)  
Ferrule; Sleeve for 1 mm² / AWG 18; unin-  
sulated; electro-tin plated



[Item No.: 216-143](#)  
Ferrule; Sleeve for 1 mm² / AWG 18; unin-  
sulated; electro-tin plated; electrolytic  
copper; gastight crimped; acc. to DIN  
46228, Part 1/08.92



[Item No.: 216-123](#)  
Ferrule; Sleeve for 1 mm² / AWG 18; unin-  
sulated; electro-tin plated; silver-colored



[Item No.: 216-204](#)  
Ferrule; Sleeve for 1.5 mm² / AWG 16; in-  
sulated; electro-tin plated; black



[Item No.: 216-224](#)  
Ferrule; Sleeve for 1.5 mm² / AWG 16; in-  
sulated; electro-tin plated; black



[Item No.: 216-244](#)  
Ferrule; Sleeve for 1.5 mm² / AWG 16; in-  
sulated; electro-tin plated; electrolytic  
copper; gastight crimped; acc. to DIN  
46228, Part 4/09.90; black



[Item No.: 216-264](#)  
Ferrule; Sleeve for 1.5 mm² / AWG 16; in-  
sulated; electro-tin plated; electrolytic  
copper; gastight crimped; acc. to DIN  
46228, Part 4/09.90; black



[Item No.: 216-284](#)  
Ferrule; Sleeve for 1.5 mm² / AWG 16; in-  
sulated; electro-tin plated; electrolytic  
copper; gastight crimped; acc. to DIN  
46228, Part 4/09.90; black



[Item No.: 216-124](#)  
Ferrule; Sleeve for 1.5 mm² / AWG 16; un-  
insulated; electro-tin plated



[Item No.: 216-144](#)  
Ferrule; Sleeve for 1.5 mm² / AWG 16; un-  
insulated; electro-tin plated; electrolytic  
copper; gastight crimped; acc. to DIN  
46228, Part 1/08.92; silver-colored



[Item No.: 216-104](#)  
Ferrule; Sleeve for 1.5 mm² / AWG 16; un-  
insulated; electro-tin plated; silver-colo-  
red

1.1.2 Marking

1.1.2.1 Marking strip



**Item No.: 210-332/1000-202**  
Marking strips; as a DIN A4 sheet; MARKED; 1-16 (80x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive; white



**Item No.: 210-332/1016-202**  
Marking strips; as a DIN A4 sheet; MARKED; 1-16 (80x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive; white



**Item No.: 210-332/1000-204**  
Marking strips; as a DIN A4 sheet; MARKED; 17-31 (80x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive; white



**Item No.: 210-332/1016-204**  
Marking strips; as a DIN A4 sheet; MARKED; 17-31 (80x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive; white



**Item No.: 210-332/1000-206**  
Marking strips; as a DIN A4 sheet; MARKED; 33-48 (80x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive; white



**Item No.: 210-332/1016-206**  
Marking strips; as a DIN A4 sheet; MARKED; 33-48 (80x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive; white

1.1.3 Test and measurement

1.1.3.1 Testing accessories



**Item No.: 210-136**  
Test plug; 2 mm Ø; with 500 mm cable; red

1.1.4 Tool

1.1.4.1 Operating tool



**Item No.: 210-658**  
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; angled; short; multicoloured




**Item No.: 210-720**  
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured




**Item No.: 210-657**  
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; short; multicoloured

Installation Notes


Conductor termination




Insert solid conductors via push-in termination.



Inserting a tip-bonded conductor via screwdriver.





Removing a solid conductor.



Inserting/removing a ferruled conductor.


Marking



Labeling via self-adhesive marking strips.


Labeling via factory direct marking.

Testing




Testing with 2 mm Ø test plug.


Application

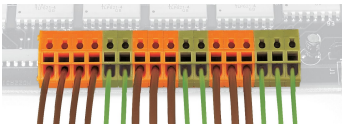

Mixed terminal strips can be assembled using different housing colors for the formation of groups.

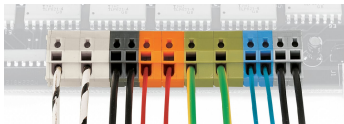

Mixed terminal strips can be assembled using different pin spacing and housing colors for the formation of groups.



Application example: field-wiring terminal strip