


Test clip XKK-200

Made of brass with all-round insulation. Toothed gripping jaws with fine-wire clamping surface. Ø 2 mm rigid socket in insulator

accepting spring-loaded Ø 2 mm plugs with rigid insulating sleeve.

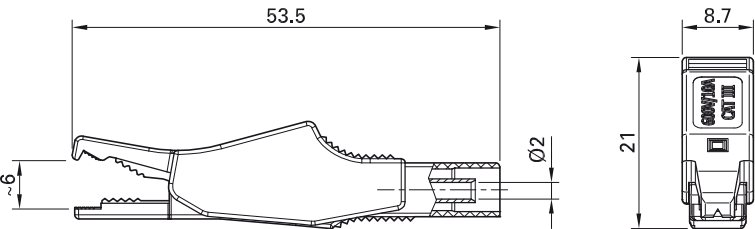


Order No.	Type	Rated voltage/current		*Standard colors
65.9188-*	XKK-200	600 V, CAT III/10 A	Ni CE c UL US	21 22 23

Test clip lead XALF

Highly flexible. One end with test clip with all-round insulation and toothed gripping jaws with fine-wire clamping surface. The

other end with Ø 2 mm MULTILAM plug with rigid insulating sleeve.

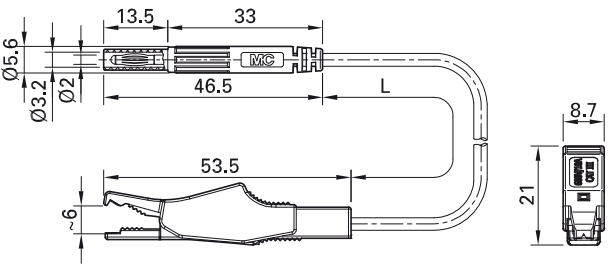

Order No.	Type	Rated voltage/current	Lead		Lead lengths L [cm]	*Standard colors
65.9185-□*	XALF	600 V, CAT III/10 A	PVC 0.75mm <sup>2</sup>	Ni CE c UL US	100	21 22 23



Optional lengths on demand  
Further information, page 6