


Test probes

Test probe PP-130

With stainless steel needle, ground to a sharp point, e.g. for piercing thin insulation and oxide layers. The insulation can be cut back in steps to bare a suitable length of tip. The

test probe features an anti-roll finger guard. Ø 4 mm rigid socket in handle. Supplied with protective cap.

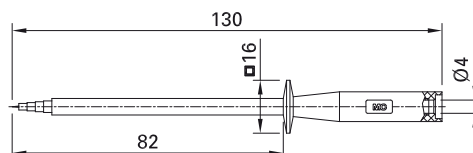


Order No.	Type	Rated voltage/current	*Standard colors
64.9205-*	PP-130	AC 30 V / 1 A DC 60 V / 1 A	21 22 23 24 25

Test probe SPP4-S

Test probe with tapered, stainless steel rigid needle and with handle guard chamfered on

both sides. Ø 4 mm rigid socket in handle accepting spring-loaded Ø 4 mm plugs with

rigid insulating sleeve. Supplied with protective cap.

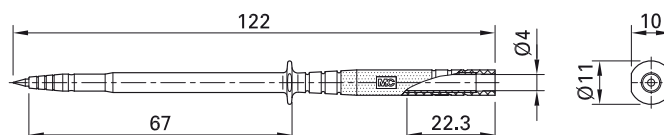

Order No.	Type	Rated voltage/current		*Standard colors
24.0235-*	SPP4-S	1000 V, CAT III / 1 A	CE	21 22