182-0120-20 ACTIVE

DEUTSCH

TE Internal #: ZPF000000000001935

Connector Contacts, Pin, Gold, Gold Wire Contact Termination Area Plating Material, Operating Voltage 115 VAC, Operating

Voltage 115 VDC

View on TE.com >



Connectors > Rectangular Connectors > Connector Contacts



Contact Type: Pin

Contact Mating Area Plating Material: Gold

Wire Contact Termination Area Plating Material: Gold

Operating Voltage: 115 VDC

Features

Product Type Features	
Barrel Type	Crimp
Connector System	Cable-to-Cable
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Compatible With Wire & Cable Type	Discrete Wire
Electrical Characteristics	
Operating Voltage	115 VDC
Body Features	
Lattice Contact Mating Area Plating Material	Gold
Contact Features	
Contact Type	Pin
Contact Mating Area Plating Material	Gold
Wire Contact Termination Area Plating Material	Gold
Contact Retention Within Housing	With
Contact Size Code	20
Contact Base Material	Copper Alloy

7.5 A

Contact Current Rating (Max)



Termination Features

Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Contact Retention Type Within Housing	Spring
Dimensions	
Wire Size	.205 – .518 mm²
Usage Conditions	
Operating Temperature Range	-65 – 175 °C[-85 – 347 °F]
Operation/Application	
Circuit Application	Power & Signal & Data

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Out of Scope
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2020 (205) Candidate List Declared Against: JAN 2019 (197) Pb (1.2% in Contact material)
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2020 (205) Candidate List Declared Against: JAN 2019 (197)
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in



articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts



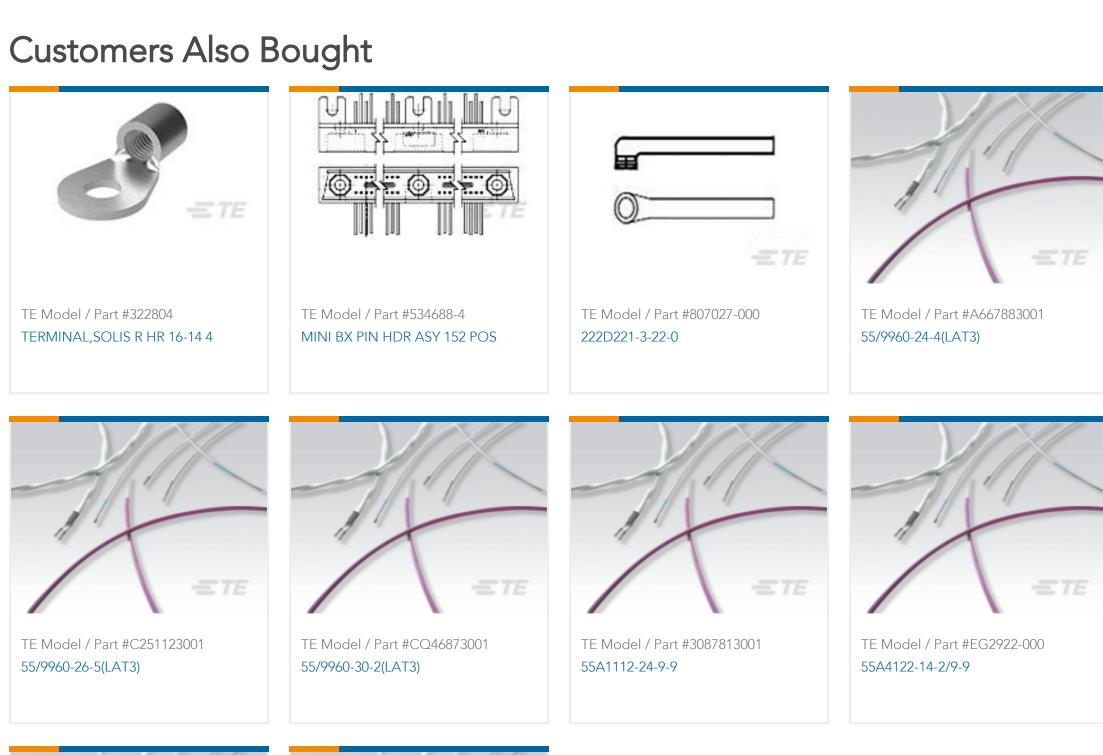

TE Model / Part #EG2940-000 55A4142-14-2/5/6/9-9



Documents

Datasheets & Catalog Pages

Connector Contacts, Pin, Gold, Gold Wire Contact Termination Area Plating Material, Operating Voltage 115 VAC, Operating Voltage 115 VDC



DEUTSCH Contacts Quick Reference Guide

English

Product Environmental Compliance

REACH Substance Communication Document

English