


客户料号:R696  
产品图号:

版次	详细描述	变更日期	变更者
A/0			

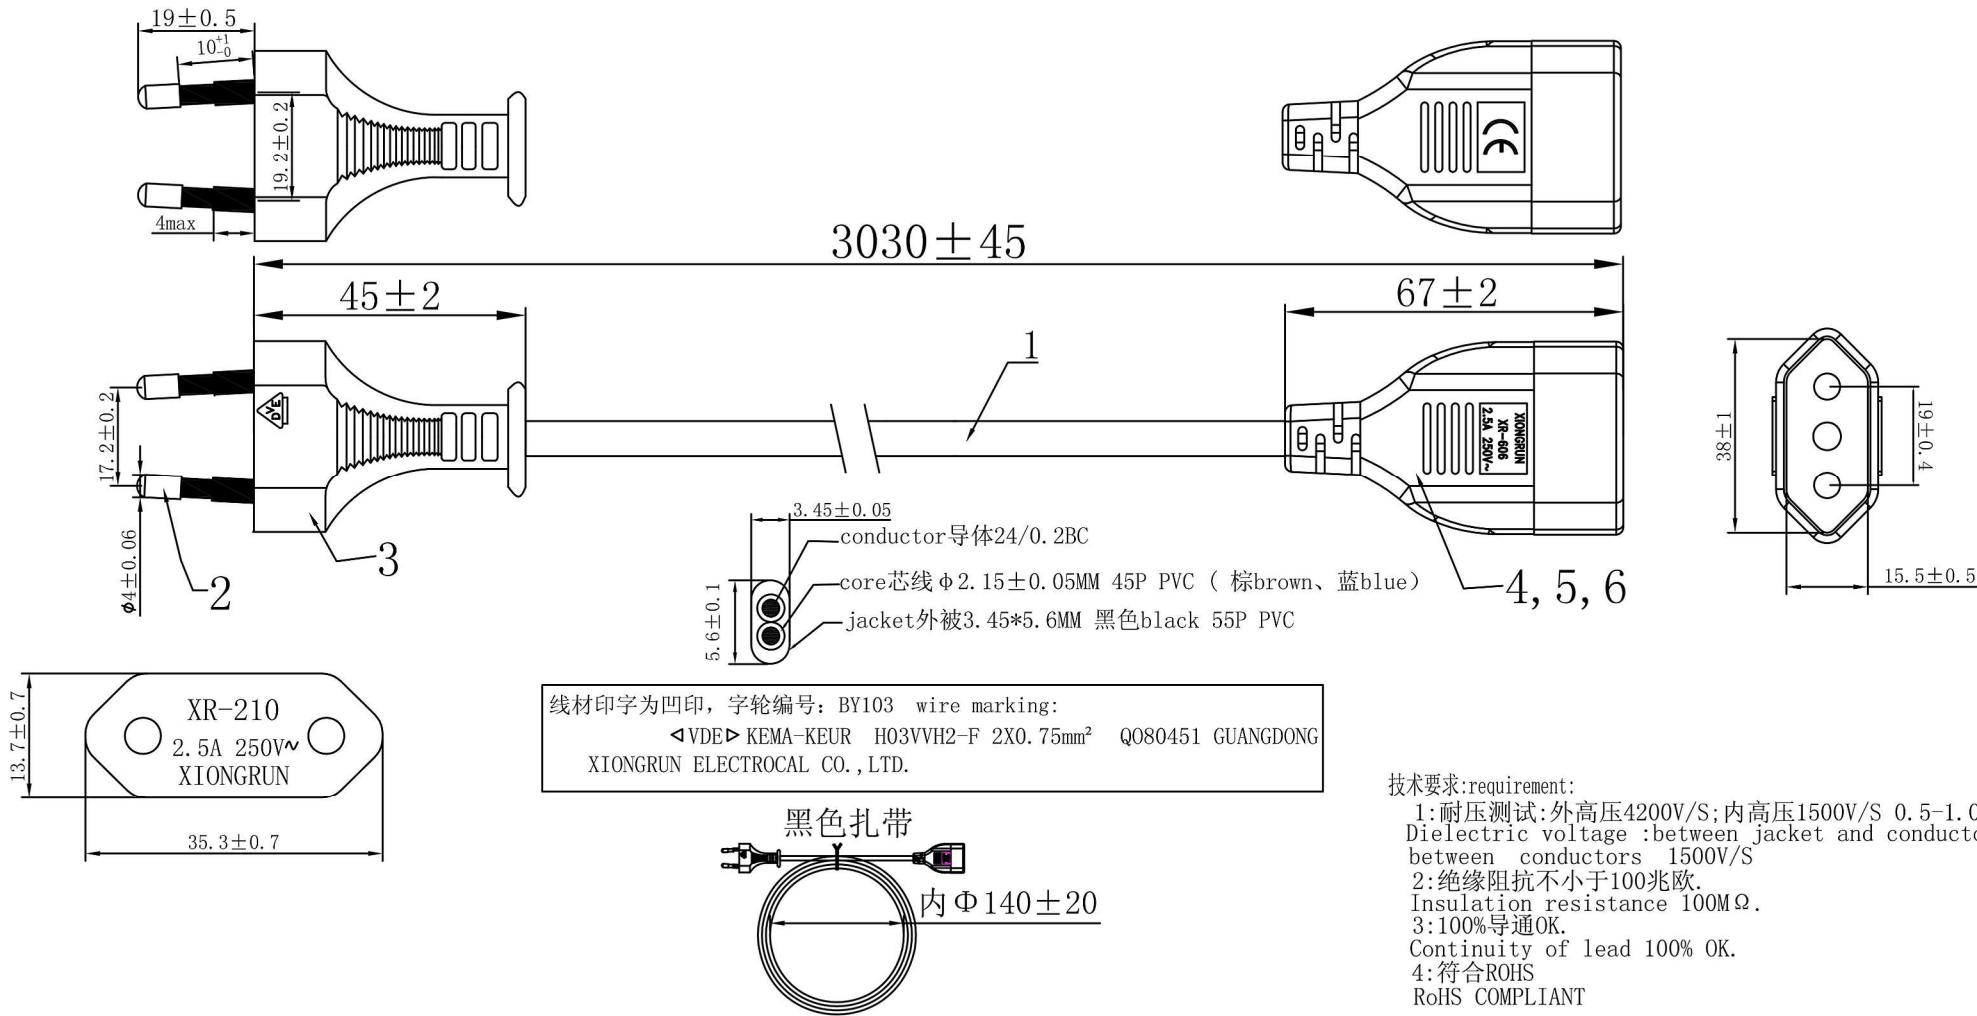

技术要求:requirement:  
 1:耐压测试:外高压4200V/S;内高压1500V/S 0.5-1.0mA  
 Dielectric voltage :between jacket and conductors 4200V/S  
 between conductors 1500V/S  
 2:绝缘电阻不小于100兆欧.  
 Insulation resistance 100MΩ.  
 3:100%导通OK.  
 Continuity of lead 100% OK.  
 4:符合ROHS  
 RoHS COMPLIANT

6	欧规两芯母内架, 黑色	JB6063001-0	1	EA
5	两芯母欧洲端子	DAAZ00003T-1B	2	EA
4	欧洲母插头 (XR-606) COLOR:黑色BLACK 55P PVC	BC7055PBK0011	0.0243	Kg
3	欧洲插头 (XR-210) COLOR:黑色BLACK 55P PVC	BC7055PBK0011	0.0172	Kg
2	两芯欧洲端子(黑色绝缘)	DAAZ00001T-1B	1	EA
1	H03VVH2-F 2X0.75mm² COLOR:黑色BLACK 裁线长:L=3000mm.	CV3H22075A00101	1	EA
NO.	DESCRIPTION	Xiongrun PN	QTY	unit

**HAWA**  
HAns WAgner GmbH

DESCRIPTION	AC POWER CABLE	DRAW NO.	XR-0672323	UNIT	M M
PARTS NO		SCALE	NONE	DATE	25/02/2016
APPROVED		CHECKED		DRAWING	陆剑