

Description:

This disposable heel grounder is ideal for outfitting visitors in ESD controlled areas. The black conductive strip is bordered by bright yellow colour material providing excellent visibility, assisting in enforcing an ESD control programme. The conductive non-woven nylon strip is held to the heel of the shoe by pressure sensitive adhesive.

To Attach:


1. Strip release paper from pressure sensitive adhesive.
2. Insert the non-adhesive end of the heel grounder inside the shoe so that the black dot is in the center of the heel area, facing upwards.
3. Wrap the tape snugly around the outside of the shoe so that the adhesive area adheres to the underside of the heel of the shoe.
4. Step firmly onto pressure-sensitive adhesive and tear off excess material at serration.
5. Check for proper ground connection with the Charleswater Combination Wrist Strap/ Footwear Tester.
6. One heel grounder should be used on each foot.

Electrical Performance:

1. The tab to cup resistance is < 10E5 - 10E7 ohms.

| ITEM NO. | DESCRIPTION | LENGTH | PKG. |
|-----------------------|-------------------------------|--------|------|
| 70001 | Foot Ground, Heel, Disposable | 298mm | 100 |
| 70033 | Foot Ground, Heel, Disposable | 298mm | 50 |

Caution: The heelgrounder is for ESD control. It will not reduce or increase your risk of receiving electric shock when using or working on electrical equipment.

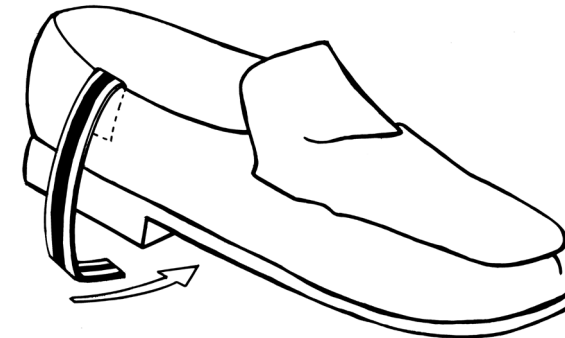

Note:

Two heel straps are recommended for reliable grounding and ESD protection, providing ground when one foot is off the floor.

Operator is grounded when foot is in contact with grounded dissipative or conductive flooring.

Charleswater recommends the use of [99004](#) foot ground tester. Download Technical Bulletin [PPE-5011.E](#).

Disposable Heelgrounder Dispenser

Designed to be mounted on a wall. Printed with instructions for use of Disposable Heelgrounder. Treated with antistatic coating.

Size: 315 x 200 x 55mm, tray is 105mm deep

[70003](#) - Tray, wall mounted



Disposable Heelgrounder

CHARLESWATER LTD.
UNIT 17. MILLBROOK BUSINESS PARK, SYBRON WAY
CROWBOROUGH, EAST SUSSEX TN6 3JZ UNITED KINGDOM
PHONE: 00 44 (0) 1892-665313, FAX: 00 44 (0) 1892-668838
INTERNET: Charleswater.co.uk

Drawing Number
70001.E

DATE:
June 2010