


Data Sheet | Item Number: 222-412
CLASSIC Splicing Connector; for all conductor types; max. 4 mm²; 2-conductor;
with levers; gray housing; Surrounding air temperature: max 40°C; 2,50 mm²; gray



<https://www.wago.com/222-412>



Color:  gray

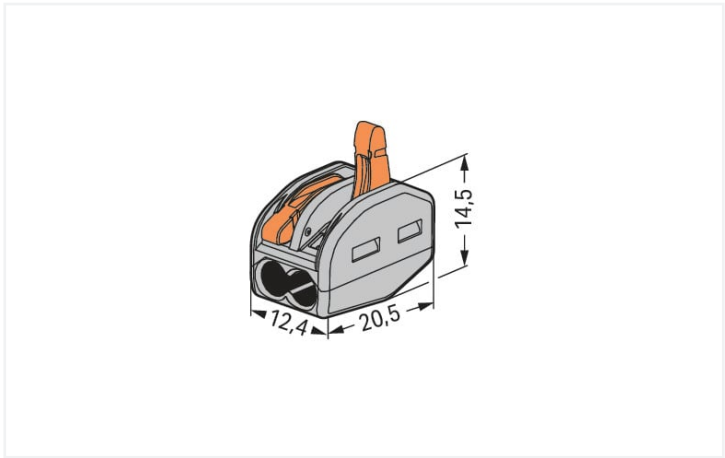

Dimensions in mm

Notes

Safety information 1	in grounded power lines
----------------------	-------------------------

Electrical data

Ratings per IEC/EN	
Ratings per	EN 60664
Nominal voltage (III/2)	400 V
Rated surge voltage (III/2)	4 kV
Rated current	32 A
Legend (ratings)	(II / 2) ≙ Overvoltage category II / Pollution degree 2

Connection data







Connection points	2
Total number of potentials	1

Connection 1	
Connection technology	CAGE CLAMP®
Actuation type	Lever
Connectable conductor materials	Copper
Solid conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG
Wiring direction	Side-entry wiring



Material Data	
Note (material data)	
Information on material specifications can be found here	
Color	gray
Flammability class per UL94	V0
Fire load	0.079 MJ
Actuator color	orange
Weight	3.1 g

Commercial data	
eCl@ss 10.0	27-14-11-04
eCl@ss 9.0	27-14-11-04
ETIM 8.0	EC000446
ETIM 7.0	EC000446
PU (SPU)	500 (50) pcs
Packaging type	Box
Country of origin	DE
GTIN	4050821346470
Customs tariff number	85369010000

Approvals / Certificates		
General approvals		
  		
Approval	Standard	Certificate Name
ENEC 15 UL International Demko A/ S	EN 60998	ENEC-01360
UL_Listed_64KA UL International Germany GmbH	UL 467	E201573
UL UL International Germany GmbH	UL 486C	E69654
Approvals for marine applications		
  		
Approval	Standard	Certificate Name
ABS American Bureau of Ship- ping	-	18-HG1755093-PDA
DNV GL Det Norske Veritas, Ger- manischer Lloyd	EN 60998	TAE000015T
LR Lloyds Register	EN 60998	LR22207029TA

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 222-412	

Documentation



Bid Text			
222-412	19.02.2019	xml 3.38 KB	↓
222-412	23.01.2019	docx 15.35 KB	↓


CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 222-412	EPLAN Data Portal 222-412
↓	↓
	WSCAD Universe 222-412
	↓
	ZUKEN Portal 222-412
	↓

1 Compatible Products
1.1 Optional Accessories
1.1.1 Mounting adapter
1.1.1.1 Mounting accessories




Item No.: [222-500](#)
Mounting carrier; 222 Series; for DIN-35 rail mounting/screw mounting; orange


Installation Notes
Conductor termination



Strip conductor to 9 ... 10 mm (0.35 ... 0.39 inch).



Termination: Lift the lever to open the clamping unit and insert a stripped conductor.




Then, lower the lever to close the clamp.

Testing



Testing via Profi-LED+ voltage tester (206-806).


Application




Wiring fine-stranded conductors in junction boxes.



Custom low-voltage lighting system



Connecting pre-wired and pre-fabricated components (e.g., in mobile homes).



Lighting fixture connection with fine-stranded wires and power feed



Compact, lever-operated splicing connectors:

They connect up to five stripped, fine-stranded conductors from 0.08 to 4 mm² (28 ... 12 AWG), as well as solid or stranded conductors from up to 2.5 mm² (12 AWG) – without tools!

How they work:

Pull up one of the orange operating levers to open the clamping unit so that the lever engages and keeps the clamp in its opened position. Then insert the conductor and push the lever back down, flush with the connector housing.

Safety:

The lever's specially designed rest position reliably prevents accidental unclamping of a connected conductor. Application safety, for any type of conductor (solid, stranded, fine-stranded), is confirmed by approvals like ENEC or UL.

ENEC is the European mark for electrical products that demonstrates compliance with European safety standards. The ENEC mark is subjected to the same EN standards as the VDE mark.

While the VDE mark is only permitted in Germany, the ENEC mark is accepted in more than 20 European countries.