

TXR40AB90-1208AI

✓ ACTIVE

RAYCHEM | RAYCHEM TXR

TE Internal #: 749301-000

Ruggedized Backshells & Adapters, RAYCHEM TXR

[View on TE.com >](#)



Connectors > Connector Backshells & Adapters > Ruggedized Backshells & Adapters



Connector General Specification Number: MIL-DTL-38999 Series III/Class C,F,K,W, MIL-DTL-38999 Series IV/Class C,F,W, MIL-DTL-38999 Series IV/Class C,W, MIL-DTL-38999 Series IV/Class F,W

Backshell Material: Aluminum

Adapter Plating Material: Cadmium (AMS-QQ-P-416, Type II, Class 3)

Cable Diameter Range: 6.4 – 10.2 mm [.25 – .4 in]

Adapter Angle: 90

Features

Product Type Features

| | |
|------------------------------|---|
| Termination Device Included | TR08AI |
| Pluggable I/O Accessory Type | Tinel-Lock Adapter |
| Adapter Angle | 90 |
| Termination Device Type | Side-Entry Tinel-Lock Ring, Tinel-Lock Adapter, Tinel-Lock Ring |

Body Features

| | |
|--------------------------|--|
| Color | Olive Drab |
| Backshell Material | Aluminum |
| Adapter Plating Material | Cadmium (AMS-QQ-P-416, Type II, Class 3) |
| TE Adapter Code | 40 |
| Adapter Entry Size | 8 |

Termination Features

| | |
|-----------------------|-----------------|
| Overbraid Termination | Tinel-Lock Ring |
|-----------------------|-----------------|

Dimensions

| | |
|----------------------|----------------------------|
| Cable Entry Diameter | .2 – 12.7 mm[.01 – .5 in] |
| Product Length | 27 mm[1.06 in] |
| Cable Diameter Range | 6.4 – 10.2 mm[.25 – .4 in] |

Usage Conditions



| | |
|-----------------------|--------|
| Salt Spray Resistance | 500 Hr |
|-----------------------|--------|

| | |
|-----------------------------|----------------------------|
| Operating Temperature Range | -65 – 175 °C[-85 – 347 °F] |
|-----------------------------|----------------------------|

Operation/Application

| | |
|--------------------------------------|-------|
| Compatible With Connector Shell Size | C, 13 |
|--------------------------------------|-------|

Industry Standards

| | |
|---------------------------------------|---|
| Connector Detail Specification Number | D38999/20, D38999/24, D38999/26, D38999/40, D38999/42, D38999/46, D38999/47 |
|---------------------------------------|---|

Other

| | |
|--|---|
| Connector General Specification Number | MIL-DTL-38999 Series III/Class C,F,K,W, MIL-DTL-38999 Series IV/Class C,F,W, MIL-DTL-38999 Series IV/Class C,W, MIL-DTL-38999 Series IV/Class F,W |
|--|---|

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

| | |
|------------------------------|---------------|
| EU RoHS Directive 2011/65/EU | Not Compliant |
|------------------------------|---------------|

| | |
|-----------------------------|---------------|
| EU ELV Directive 2000/53/EC | Not Compliant |
|-----------------------------|---------------|

| | |
|---|--------------------------------------|
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold |
|---|--------------------------------------|

| | |
|--|--|
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUL 2021 (219) SVHC > Threshold: Cd (3% in BODY & NUT) Pb (.3% in BODY & NUT) Article Safe Usage Statements: Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location. |
|--|--|

| | |
|-----------------|---|
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
|-----------------|---|

| | |
|---------------------------|--|
| Solder Process Capability | Not applicable for solder process capability |
|---------------------------|--|

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on



requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 173643-000
RH-3960-1-TINEL-KIT-120V

Also in the Series | RAYCHEM TXR

Ruggedized Backshells & Adapters
(2064)

Screened Backshells & Adapters(1)

Customers Also Bought

TE Part #629267-000
TXR40AB00-1608AI

TE Part #820593-000
TXR40AB00-2012AI

TE Part #423209-000
TXR40AB00-0804AI


TE Part #658819-000
TXR40AB00-1006AI

TE Part #497361-000
TXR40AB00-1208AI

TE Part #C538733001
RAY-101-12.5(100)

TE Part #A165103001
RAY-101-7.5(100)

TE Part #A513413001
RAY-101-6.0(100)

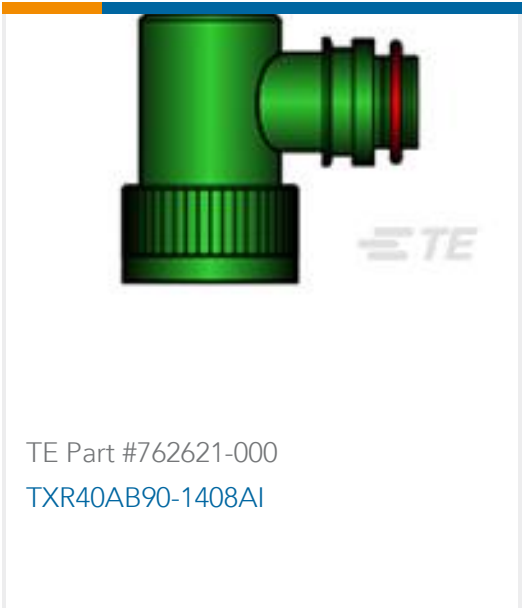

TE Part #762621-000
TXR40AB90-1408AI



TE Part #2174219-1
Push-Pull 7P Plug PS S-Cup Cont KIT/N

Documents

Product Drawings

TXR40AB90-1208AI

English

CAD Files

Customer View Model

ENG_CVM_CVM_749301-000_99.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_749301-000_99.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_749301-000_99.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

5-1654025-5_sec6_Adapters

English

Circular Backshells

English

Product Specifications

General Information Package for Tinel-Lock Adapters

English

Product Specification

English

Braid termination using a Tinel Lock Ring installed using a resistance heater.

French

Braid termination using a Tinel Lock Ring installed using a resistance heater.

English

PERFORMANCE SPECIFICATION Tinel-Lock Rings, Heat Recoverable for Braid Termination

English



ASSEMBLY GUIDE for Tinel -Lock Rings, Heat Recoverable for Braid Temination

English

Instruction Sheets

Instruction Sheet (U.S.)

English