


BITS & SLEEVES WIRE WRAPPING

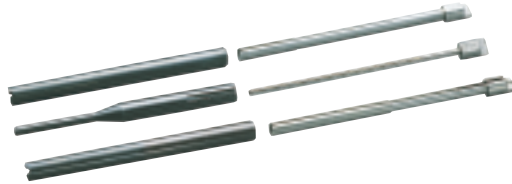

Fully compatible with any make or model wire wrapping tool.

3" BITS AND SLEEVES CHART (AWG) INCHES

| Wire Gauge (AWG) | Regular | Modified | Bit Part No. | Sleeve Part No. | Maximum Insulation Diameter Inches | Minimum Terminal Diagonal Inches | Maximum Terminal Diagonal Inches | Terminal Hole Depth Inches | Effective Radius Inches | Terminal Hole Diameter Inches |
|------------------|---------|----------|--------------|-----------------|------------------------------------|----------------------------------|----------------------------------|----------------------------|-------------------------|-------------------------------|
| 20 | | ● | WB20M | P194LN | .059 | .042 | .073 | 1.000 | .150 | .075 |
| 20-22 | ● | | KB2075 | P2224 | - | .042 | .073 | 1.000 | .123 | .075 |
| 22 | ● | | KB22 | P2224 | - | .054 | .073 | .750 | .117 | .075 |
| 22 | | ● | WB2275M | P2224 | .052 | .049 | .074 | 1.000 | .132 | .075 |
| 22-24 | ● | | KB224LH | P2224 | - | .061 | .085 | 1.000 | .117 | .086 |
| 22-24 | ● | | KB224-1 | P2224 | - | .054 | .073 | 1.000 | .111 | .075 |
| 22-24 | ● | | KB224 | P2224 | - | .054 | .073 | .807 | .111 | .075 |
| 22-24 | | ● | WB224M | P2224 | .050 | .049 | .074 | 1.250 | .121 | .075 |
| 24 | | ● | WB24DH | P2224 | .046 | .054 | .073 | 1.750 | .117 | .075 |
| 24 | ● | | KB24 | P2426 | - | .055 | .074 | .750 | .100 | .075 |
| 24 | | ● | *WB24SM | P3032LN | .044 | .024 | .043 | .750 | .098 | .044 |
| 24-26 | | ● | WB2426M | P2224 | .046 | .054 | .073 | .750 | .118 | .075 |
| 26 | ● | | KB26 | P2426 | - | .058 | .073 | 1.000 | .100 | .075 |
| 26 | | ● | *WB26SM | P26LN | .031 | .023 | .038 | .750 | .075 | .040 |
| 26 | | ● | WB26M | P2224 | .046 | .054 | .073 | 1.000 | .118 | .075 |
| 26 | | ● | *WB2644M | P3032LN | .046 | .024 | .043 | .750 | .098 | .044 |
| 26 | | ● | WB2669M | P2426 | .041 | .053 | .068 | 1.000 | .109 | .069 |
| 28 | | ● | WB2870M | P2426 | .034 | .053 | .068 | 1.000 | .103 | .070 |
| 28 | | ● | WB285HM | P3032 | .030 | .031 | .035 | .750 | .066 | .036 |
| 30 | | ● | *SB30MSH-B | P3032 | .027 | .031 | .035 | .750 | .064 | .036 |
| 30 | | ● | *SB30MMK | P3032 | .023 | .031 | .035 | .750 | .064 | .036 |
| 30-32 | | ● | *WB3032M | P3032 | .027 | .034 | .038 | .750 | .064 | .040 |
| 30-32 | ● | | KB3032 | P3032 | - | .034 | .038 | .750 | .064 | .040 |

*These tools are recommended for .025" square terminals on .100" centers

BITS & SLEEVES